2023 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT FEDERAL CCR RULE

WESTLAND ASH MANAGEMENT FACILITY CELL B, DICKERSON, MARYLAND

GenOn MD Ash Management LLC

25100 Chalk Point Road Aquasco, Maryland 20608



January 2024

Prepared by:

Geosyntec Consultants, Inc. 10211 Wincopin Circle Floor 4 Columbia, Maryland 21044

TABLE OF CONTENTS

		<u>Pag</u>	<u>e</u>
EXEC	UTIV	E SUMMARYII	I
EXEC	UTIV	E SUMMARY (CONTINUED)IV	/
1.	INTR	ODUCTION	1
2.	SITE	DESCRIPTION	1
	2.1 2.2	Site Description	1
3.	GRO	UNDWATER MONITORING SYSTEM2	2
4.	CCR	RULE GROUNDWATER MONITORING COMPLETED – 2023	3
		Groundwater Monitoring	3 3 4
5.	DET	ECTION MONITORING STATISTICS	4
	5.1	Statistically Significant Increases Comparison Test	4
6.	ASS	ESSMENT MONITORING STATISTICS	5
	6.1 6.2	Statistically Significant Levels Test	
7.	PRO	BLEMS ENCOUNTERED AND RESOLUTIONS	3
8.	STA	TUS OF MONITORING PROGRAM	ô
9.	PLA	NNED KEY ACTIVITIES FOR 2024	ô
10.	REC	OMMENDATIONS	7
11.	REF	ERENCES	3
		LIST OF FIGURES	
Figure	1:	Site Location Map	
Figure	2:	Site Feature and Groundwater Monitoring Well Network	
Figure	3:	Groundwater Potentiometric Surface – January 2023	
Figure	4:	Groundwater Potentiometric Surface – July 2023	

TABLE OF CONTENTS (Continued)

LIST OF TABLES

Γable 1:	Well Construction Details
Γable 2:	Summary of Baseline Monitoring Events
Γable 3:	Summary of Detection/Assessment Monitoring Events
Γable 4:	Groundwater Elevation Measurements
Γable 5:	Monitoring Program Appendix III Analytical Data – Background Wells
Гable 6:	Monitoring Program Appendix III Analytical Data – Compliance Wells
Γable 7:	Monitoring Program Appendix IV Analytical Data – Background Wells
Γable 8:	Monitoring Program Appendix IV Analytical Data – Compliance Wells
Гable 9:	Statistically Significant Levels – Appendix IV Constituents

LIST OF APPENDICES

Appendix A: Groundwater Flow Velocity Calculations

EXECUTIVE SUMMARY

This Groundwater Monitoring and Corrective Action Report (Report) has been prepared by Geosyntec Consultants, Inc. (Geosyntec) on behalf of GenOn MD Ash Management LLC (MD Ash) to summarize the groundwater monitoring activities conducted at Cell B at the Westland Ash Management Facility (Site) in Dickerson, Maryland pursuant to the Coal Combustion Residuals (CCR) Rule (40 Code of Federal Regulations [CFR] § 257.90(e)) through 31 December 2023. This executive summary has been included to meet the requirements of 40 CFR § 257.90(e)(6).

In the first quarter and the third quarter of 2023, the Cell B CCR unit was monitored under an assessment monitoring program in accordance with 40 CFR § 257.95. The assessment monitoring program was initiated in January 2018. Two semi-annual groundwater monitoring events (January and July) were completed during 2023 to assess which, if any, constituents listed within Appendix III of 40 CFR Part 257 were detected at concentrations which were statistically significant increases (SSIs) over background concentrations. Statistically significant level (SSL) tests were also completed for Appendix IV constituents during 2023.

During 2023, SSIs above background concentrations were detected for the following Appendix III constituents:

- Boron at Core-2S, D-6R, MW-03, MW-09, MW-10S, MW-12, and MW-24S
- Calcium at Core-2S, D-6R, MW-03, MW-09, MW-10S, MW-12, MW-13, and MW-24S
- Chloride at Core-2S, D-6R, MW-03, MW-09, MW-10S, MW-12, MW-13, MW-24D, and MW-24S
- Fluoride at MW-24D and MW-24S
- pH at D-6R, MW-03, MW-10S, MW-12, MW-13, MW-24D, and MW-24S
- Sulfate at Core-2S, D-6R, MW-03, MW-09, MW-10S, MW-12, MW-13, MW-24D, and MW-24S
- Total Dissolved Solids at Core-2S, D-6R, MW-03, MW-09, MW-10S, MW-12, MW-24D, and MW-24S

During 2023, SSLs above groundwater protection standards (GWPS) were detected for the following Appendix IV constituents:

- Lithium at D-6R, MW-03, and MW-12
- Molybdenum at MW-03 and MW-12
- Selenium at D-6R, MW-09, MW-10S, and MW-12

An Assessment of Corrective Measures (ACM) was initiated at the Site on 3 December 2018 and completed in March 2019. There has been no public meeting held for the ACM and a remedy has not been selected. Corrective measures progress reports were posted to the public internet site in July 2023 and November 2023 and will continue to be posted until remedy selection and design are complete. The ACM identified a preferred remedy consisting of: (i) removal of ash for beneficial reuse, (ii) maintaining the geomembrane cap on the inactive side slopes of Cell B during

EXECUTIVE SUMMARY (CONTINUED)

ash removal, and (iii) continued groundwater monitoring. Plans for deconstruction were submitted to Maryland Department of the Environment (MDE) in April, May, and June 2019 and November 2022. These plans were approved by MDE in September 2019, October 2020, and December 2022. Ash removal from Cell B-1A was initiated in June 2019 and from Cell B in January 2020 and will continue through 2024. The Site will continue assessment monitoring in 2024.

1

1. INTRODUCTION

The Federal Coal Combustion Residuals (CCR) Rule (40 Code of Federal Regulations [CFR] § 257.90(e)) (USEPA, 2015) requires owners and/or operators of existing CCR landfills to prepare a Groundwater Monitoring and Corrective Action Report (Report) and post it to the unit's operating record no later than 31 January 2024. Geosyntec Consultants (Geosyntec) has prepared this Report for the Cell B CCR landfill unit at the Westland Ash Management Facility in Dickerson, Maryland (Site). This Report summarizes the groundwater monitoring activities conducted pursuant to the CCR Rule through 31 December 2023.

2. SITE DESCRIPTION

2.1 <u>Site Description</u>

The Site is located in Dickerson, Montgomery County, Maryland (**Figure 1**) and is operated by GenOn MD Ash Management LLC (MD Ash). The Site is a dry ash management operation and does not have CCR surface impoundments (SI) as defined in the CCR Rule. The Site encompasses 180 acres of which approximately 64.4 acres have been used to manage CCR at the Cell B landfill. Cell C is located downgradient of Cell B, is inactive and is not regulated by the Federal CCR Rule. Cell B-1A/B has a geosynthetic liner and a leachate collection system. The unlined portion of Cell B has an underdrain system designed to collect contact stormwater and leachate and convey it to the on-site Wastewater Treatment System (WWTS) for treatment and then impoundment in Pond 003. Pond 003 stores the treated leachate prior to discharge through a National Pollutant Discharge Elimination System (NPDES) outfall. Non-contact storm water runoff is directed to either Pond 002 or towards Big Stream.

Ponds 002 and 003, which are used to manage storm water and leachate (not ash), respectively, are also exempt from the Federal CCR Rule. Features of the Site and their locations are presented on **Figure 2**.

2.2 Regional Physiographic Setting

The Site is located in the Culpepper Basin portion of the Piedmont province of Maryland and was previously used for agricultural purposes. Fractured sandstones and siltstones of the Poolesville Member of the Manassas Sandstone (referred to as the New Oxford Formation by others), with interbedded shale layers, form the upper aquifer at the Site. The overlying saprolite soils are unsaturated. Bedrock bedding planes strike north-south and dip 10-20 degrees to the west.

The groundwater table in the upper aquifer generally follows topography and flows along bedding planes toward the west but is locally influenced by Big Stream to the south and flows along bedrock strike. The hydraulic conductivity of the more fractured interbedded thin shale layers is greater than that of the massive sandstones that comprise most of the bedrock stratigraphic

sequence. Therefore, CCR constituent migration in groundwater is predominately along the shale horizons. Groundwater monitoring wells are screened in the shale layers.

3. GROUNDWATER MONITORING SYSTEM

As described in the *Basis for Groundwater Monitoring Network* (Geosyntec, 2017a), the groundwater monitoring network around Cell B was designed to comply with 40 CFR 257.91.

Groundwater quality is monitored around Cell B through a network of twelve monitoring wells. As shown on **Figure 2**, there are three upgradient monitoring wells (D-2, D-3 and D-4) that are used to measure background conditions and seven downgradient monitoring wells (MW-03, MW-09, MW-10S, MW-12, MW-13, D-6R, and Core-2S) that are used as compliance wells. The nature and extent of contamination is currently being investigated at two offsite monitoring wells (MW-24D and MW-24S).

Federal CCR Rule compliance and background monitoring wells at the Site are designed to monitor the upper aquifer conditions. Monitoring well construction and soil boring logs were provided in Geosyntec (2017a). Compliance and background monitoring well construction details are summarized in **Table 1**.

At the request of the Maryland Department of the Environment (MDE), a piezometer (PZ-Cell B) was installed in Cell B to evaluate the potential presence of groundwater in the central part of the ash of Cell B. MW-16 and MW-17 were previously installed for that purpose in 2016 in another portion of Cell B. In August 2021, a soil boring was advanced through the ash and to the top of bedrock. The presence of groundwater was not observed in the recovered soil cores. A piezometer was installed in the soil boring and gauged weekly for one month to monitor for the potential presence of groundwater. After one month of gauging, the results were provided to the MDE. On 30 November 2021, the MDE responded to the results and stated there was no evidence of groundwater in the ash at Cell B. PZ-Cell B was abandoned on 10 February 2022 following MDE approval on 28 January 2022.

Since SSLs were previously detected at monitoring wells D-6R and MW-12, two new monitoring wells (MW-24S and MW-24D) were installed downgradient of Cell B in August and September 2021. The two new monitoring wells were installed off-site and as close to the property boundary as possible. Monitoring wells MW-24S and MW-24D were installed to intercept the bedrock bedding planes (i.e., preferential flow paths) that interact with the uppermost aquifer at the Site and in accordance with 40 CFR 257.95.(g)(1)(i) were incorporated into the monitoring program in 2022. The location of monitoring wells MW-24D and MW-24S is shown in **Figure 2**, construction details are provided on **Table 1**.

4. CCR RULE GROUNDWATER MONITORING COMPLETED – 2023

4.1 **Groundwater Monitoring**

The baseline monitoring program was completed in September 2017 and the Site transitioned to detection monitoring in October 2017. Assessment monitoring began in February 2018. Groundwater monitoring continued in 2023 and was conducted in accordance with the *Sampling and Analysis Plan* (SAP) provided in Geosyntec (2018). Assessment monitoring is performed on a semi-annual basis during the first and third quarters. Two additional wells (MW-24D and MW-24S) were installed in September 2021 to monitoring the potential presence of CCR constituents migrating offsite. Baseline monitoring began at MW-24S in the first quarter 2022 and at MW-24D in the third quarter 2022. **Table 2** and **Table 3** summarize the history of baseline, detection, and assessment monitoring events through 2023.

4.1.1 Groundwater Elevation and Flow Velocities

Groundwater elevation monitoring was conducted in January and July 2023. A synoptic round of water level measurements was made at the start of each monitoring event. Groundwater elevation measurements were collected in accordance with the SAP at CCR Rule monitoring wells as well as other monitoring wells and piezometers at both Cell B and Cell C. Potentiometric surface maps based on the elevations measured during the January and July 2023 monitoring events are presented on **Figure 3** and **Figure 4**, respectively. Groundwater elevation data are summarized in **Table 4**. As shown on **Figure 3** and **Figure 4**, groundwater around Cell B flows from northeast to southwest. The groundwater elevations and flow directions are very stable across the multiple monitoring events.

The average hydraulic gradient around Cell B ranges from 0.042 ft/ft between monitoring wells D-2 and MW-09 to 0.026 ft/ft between monitoring wells D-2 and MW-03. The groundwater flow velocity calculation is provided in **Appendix A** (Geosyntec, 2019) assuming equivalent Darcy flow, although fracture flow is dominant in the bedrock. **Table A-2** shows the calculated Darcy-equivalent groundwater flow velocities at the Site ranged from 1.80 X 10⁻⁵ centimeters per second (cm/sec) (18.6 inches/month; 18.6 feet/year) between monitoring wells D-2 and MW-03 to 3.93 X 10⁻⁶ cm/sec (4.07 inches/month; 4.07 feet/year) between monitoring wells D-2 and MW-13.

4.1.2 Detection Monitoring Program

In October 2017, the first detection monitoring program samples were collected. In accordance with 40 CFR § 257.94(a) of the CCR Rule, samples were analyzed for Appendix III list parameters only. Groundwater elevation data and analytical results for Appendix III constituents in background and compliance wells are presented in the 2017 Annual Groundwater Monitoring and Corrective Action Report (Geosyntec, 2018a). Detection monitoring did not take place during 2023 but Appendix III parameters were monitored at all wells and evaluated for potential SSIs as part

of the assessment monitoring program. Analytical data for Appendix III constituents in background and compliance wells are summarized on **Table 5** and **Table 6**, respectively.

4.1.3 Assessment Monitoring Program

An assessment monitoring program was triggered at the Site in January 2018 when statistically significant increases (SSIs) were detected in the monitoring results from the October 2017 groundwater detection monitoring event. In February 2018, in accordance with 40 CFR § 257.95(a) of the CCR Rule, samples were analyzed for all Appendix III and IV list parameters. Resampling for the Appendix IV constituents detected in the February 2018 assessment monitoring event was conducted in May 2018. Assessment monitoring events have been completed semi-annually since May 2018. The twelfth and thirteenth semi-annual assessment monitoring events were completed in January and July 2023, respectively. Analytical data for Appendix IV constituents in background and compliance monitoring wells are summarized in **Table 7** and **Table 8**, respectively. The Site remains in assessment monitoring.

4.2 <u>Data Usability</u>

Upon receipt of laboratory analytical reports, the data were evaluated for usability. Analytical data were checked for the following:

- Samples were analyzed within the method-specified hold times;
- Samples were received within holding temperature;
- The chain of custody was complete;
- Precision was within SAP control limits using relative percent differences of blind duplicate samples;
- Matrix spike and matrix spike duplicate recoveries and laboratory control samples were within the SAP control limits; and
- Potential for positive bias was evaluated using method blanks concentrations.

Upon completion of the data usability assessment the data were qualified as needed and added to the data tables. All data received were considered complete and usable.

5. DETECTION MONITORING STATISTICS

In accordance with 40 CFR § 257.94(e), detection monitoring statistics were used to evaluate groundwater concentrations of Appendix III parameters collected during the January and July 2023 monitoring events.

5.1 Statistically Significant Increases Comparison Test

The baseline monitoring data collected from the three background wells (D-2, D-3, and D-4) between 2015 and 2017 were previously used to select statistical methods for calculating the range

of background concentrations for Appendix III constituents. These data are discussed and presented in Geosyntec (2018b). The resulting background concentrations are summarized in **Table 6** based upon upper prediction limit (UPL) methods. The calculations are documented and certified by a P.E. as being appropriate for the background data set in Geosyntec (2017b).

In 2023, at least one Appendix III constituent was detected as a SSI above background groundwater concentrations at each of the seven compliance monitoring wells. Note, no compliance wells had an SSI for fluoride. **Table 6** provides a comparison of the Appendix III detection monitoring results to the calculated background concentrations. In January 2018, the calculated background concentrations were compared to the results of the detection monitoring event in October 2017. The comparison of those data to the calculated background concentrations resulted in SSIs over background and triggered the initiation of an assessment monitoring program.

6. ASSESSMENT MONITORING STATISTICS

In accordance with 40 CFR § 257.95(g) assessment monitoring statistics were used to evaluate if concentrations of Appendix IV constituents in Cell B compliance wells were SSLs above their respective GWPS.

6.1 Statistically Significant Levels Test

The baseline and assessment monitoring data collected from the background wells were used to calculate background concentration limits for detected Appendix IV constituents using the Upper Tolerance Limit (UTL) method. Groundwater protection standards (GWPS) were established for each detected Appendix IV constituent as the greater of background or (i) the maximum contaminant level (MCL) or (ii) the EPA Regional Screening Level for cobalt, lead, lithium, and molybdenum that do not have MCLs. The baseline and assessment monitoring data collected from the compliance wells between 2015 and 2023 were used to calculate the 95% lower confidence limit (LCL) of the mean concentration for each well for each Appendix IV constituent that exceeded the GWPS in one or more samples. Those LCL concentrations were then compared to the GWPS for each Appendix IV constituent to evaluate whether there were any SSLs.

Table 9 summarizes the SSLs of Appendix IV parameters detected during the January and July 2023 assessment monitoring events. The data indicate SSLs for lithium, molybdenum, and/or selenium at five of seven Cell B compliance wells.

6.2 Assessment of Corrective Measures

The comparison of those LCLs and the GWPS resulted in statistically significant levels (SSLs) on September 4, 2018 and triggered an Assessment of Corrective Measures (ACM). In accordance with 40 CFR 257.96(a), an ACM was initiated at the Site on 3 December 2018, as required by the Federal CCR Rule when SSLs of Appendix IV constituents are detected above their respective

GWPS. The assessment monitoring program continued during the ACM. The ACM report was completed during March 2019.

7. PROBLEMS ENCOUNTERED AND RESOLUTIONS

The two new off-site nature and extent monitoring wells, MW-24S and MW-24D, have higher pH values compared to landfill leachate collected and treated at the Site and the other Site wells and might be affected by grout contamination during well construction. These wells have been redeveloped and sampled several times, but the higher pH condition persists. The higher pH might also result in unrepresentative concentrations of some constituents in samples from these wells, particularly arsenic. Appendix III constituents were detected as SSIs at MW-24S and MW-24D during the 2023 monitoring events as shown in **Table 6**. An alternative source demonstration (ASD) is being prepared and will discuss these SSIs. The ASD will be prepared and submitted in accordance with 40 CFR 257.95(g)(3)(ii). Additionally, a resolution to this condition is currently being evaluated.

8. STATUS OF MONITORING PROGRAM

As of 31 December 2023, the Site is undergoing assessment monitoring and an Assessment of Corrective Measures has been completed to address SSLs of Appendix IV constituents detected in groundwater.

9. PLANNED KEY ACTIVITIES FOR 2024

January 2024: The 2023 Annual Groundwater Monitoring and Corrective Action Report will be entered into the facility's operating record and notification will be sent to the Maryland Department of Environment (MDE).

February 2024: Collection of first semi-annual assessment monitoring groundwater samples.

March 2024: The 2023 Annual Groundwater Monitoring and Corrective Action Report will be posted to the public internet site.

April 2024: The ASD will be posted to the operating record.

May 2024: A Semi-Annual Corrective Measures Progress Report documenting progress of selecting and designing the remedy for the SSLs above the GWPSs associated with the Site will be prepared and submitted.

May/June 2024: SSI and SSL testing of the February 2024 assessment monitoring samples.

August 2024: Collection of second semi-annual assessment monitoring groundwater samples.

November 2024: A Semi-Annual Corrective Measures Progress Report documenting progress of selecting and designing the remedy for the SSLs above the GWPSs associated with the Site will be prepared and submitted.

December 2024: SSI and SSL testing of the August 2024 assessment monitoring samples.

December 2024: Preparation of the 2024 Annual Groundwater Monitoring and Corrective Action Report will begin.

Ash removal will continue through 2024 per the MDE approved deconstruction plans.


10. RECOMMENDATIONS


The Site should continue assessment monitoring in 2024.


11. REFERENCES


- Driscoll, F.G., 1986. Groundwater and Wells, Second Edition. St. Paul, Minnesota, H.M. Smyth Company.
- Geosyntec Consultants, Inc., 2017a. Basis for Groundwater Monitoring Network, Westland Ash Management Facility, Dickerson, MD, October.
- Geosyntec Consultants, Inc. 2017b. Statistical Analysis Calculations Package for Background Groundwater Cell B, Westland Ash Storage Facility, Dickerson, MD.
- Geosyntec Consultants, Inc., 2018a. Sampling and Analysis Plan, Assessment Monitoring Program, Federal CCR Rule, Westland Ash Management Facility, Cell B, Dickerson, MD, January.
- Geosyntec Consultants, Inc., 2018b. 2017 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD.
- Geosyntec Consultants, Inc. 2018c. Statistical Analysis Calculation Package for Appendix IV Constituents in Background Groundwater Cell B, Westland Ash Storage Facility, Dickerson, MD, September.
- Geosyntec Consultants, Inc. 2018d. Statistical Analysis Calculation Package for Compliance Well Appendix IV Monitoring Data Cell B, Westland Ash Storage Facility, Dickerson, MD, September.
- Geosyntec Consultants, Inc., 2019. 2018 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD, January.
- Geosyntec Consultants, Inc., 2020. 2019 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD, January.
- Geosyntec Consultants, Inc., 2021. 2020 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD, January.
- Geosyntec Consultants, Inc., 2022. 2021 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD, January.
- Geosyntec Consultants, Inc., 2023. 2022 Annual Groundwater Monitoring and Corrective Action Report, Westland Ash Management Facility, Dickerson, MD, January.
- U.S. EPA, 2009. Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities Unified Guidance, March.


U.S. EPA, 2015. Hazardous and Solid Waste Management System; Disposal of Coal Combustion Residuals from Electric Utilities (Final Rule). Fed. Reg. 80 FR 21301, pp. 21301-21501, 40 CFR Parts 257 and 261, April.



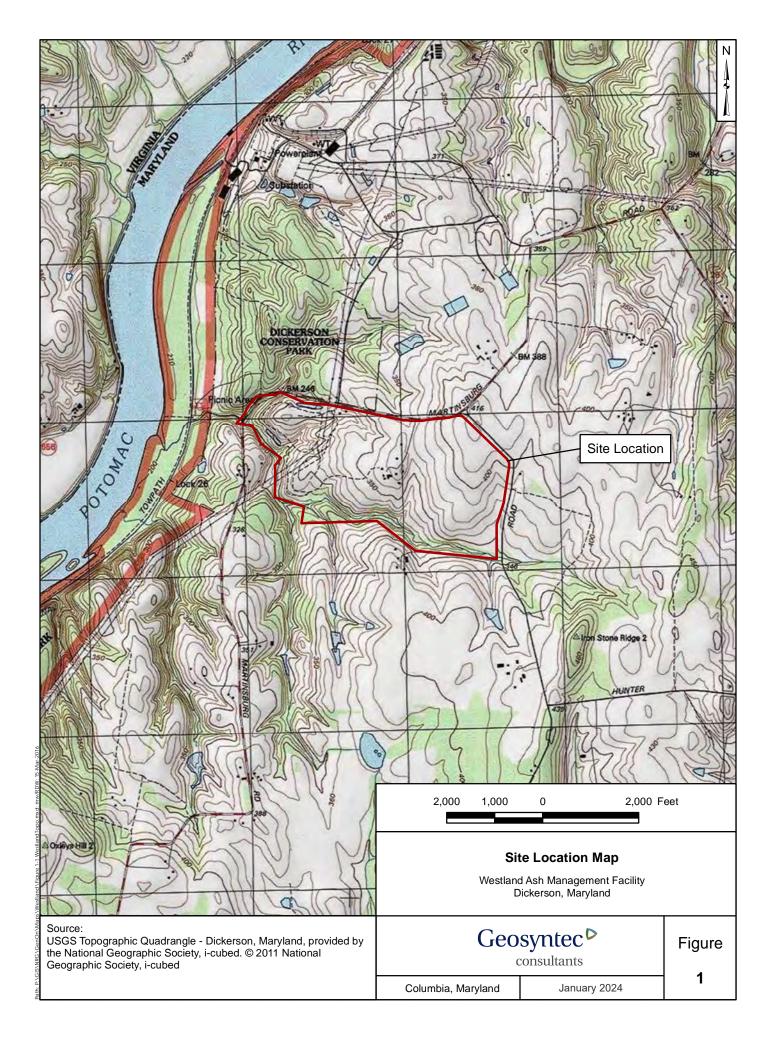

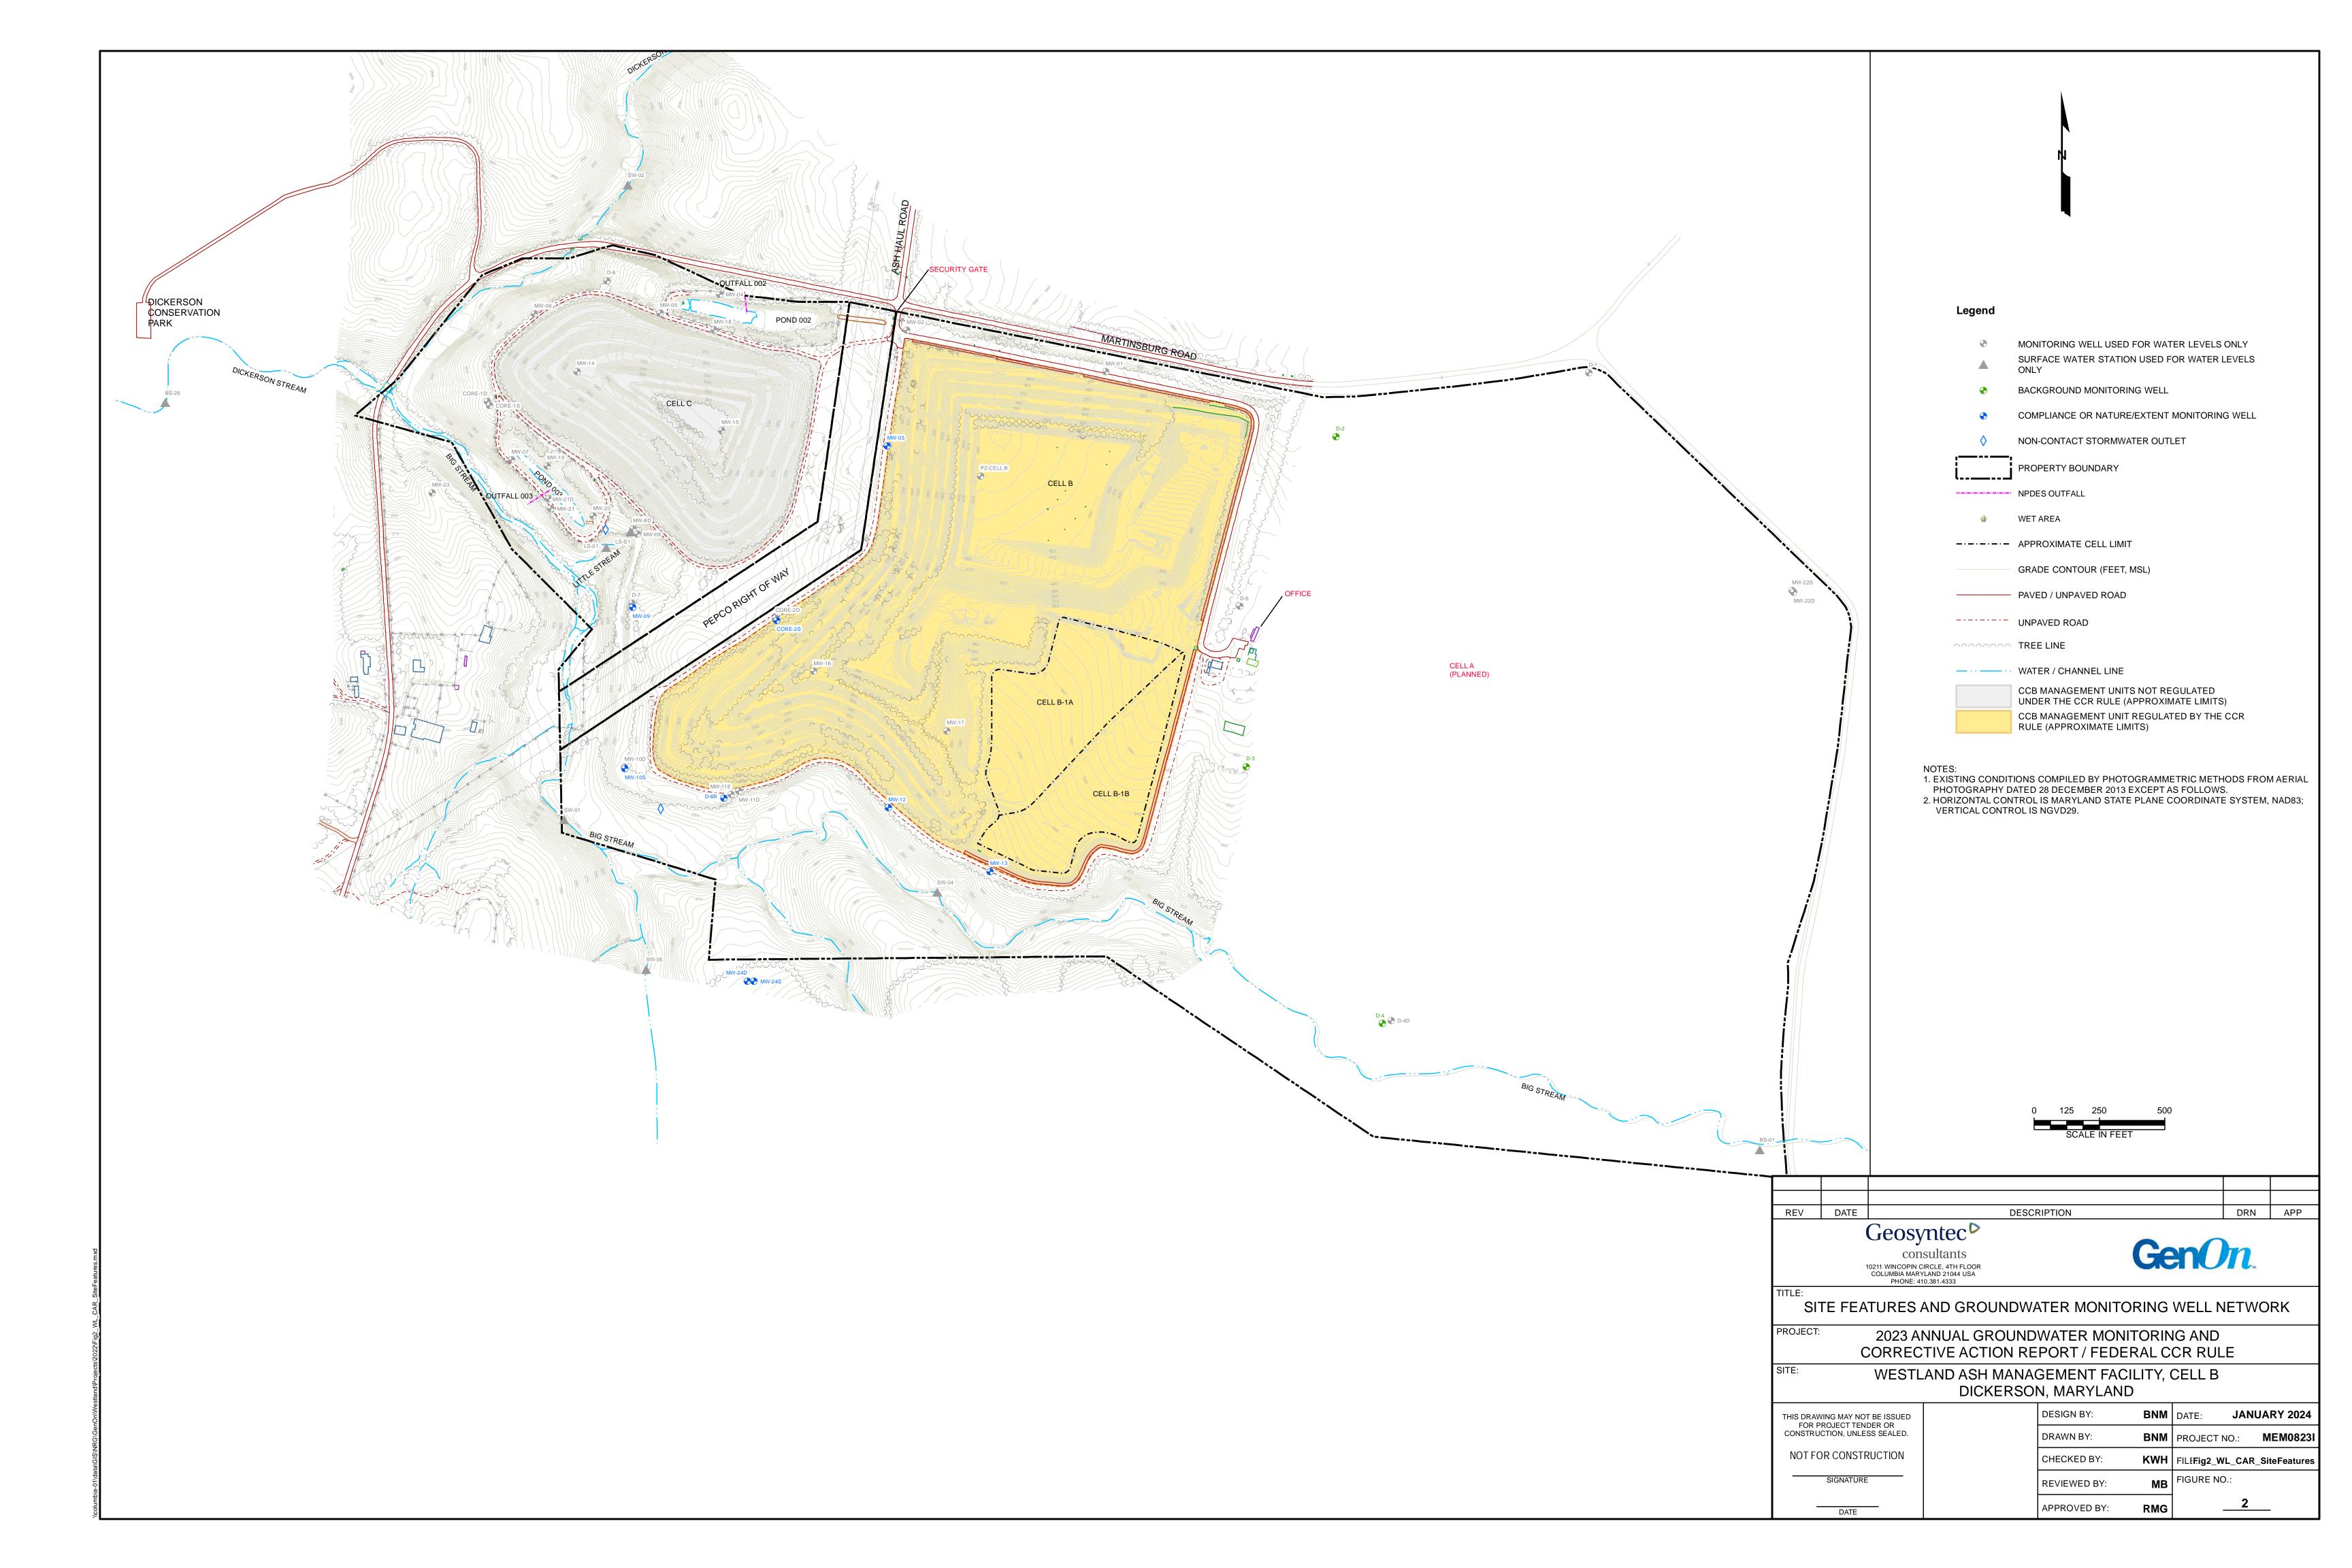

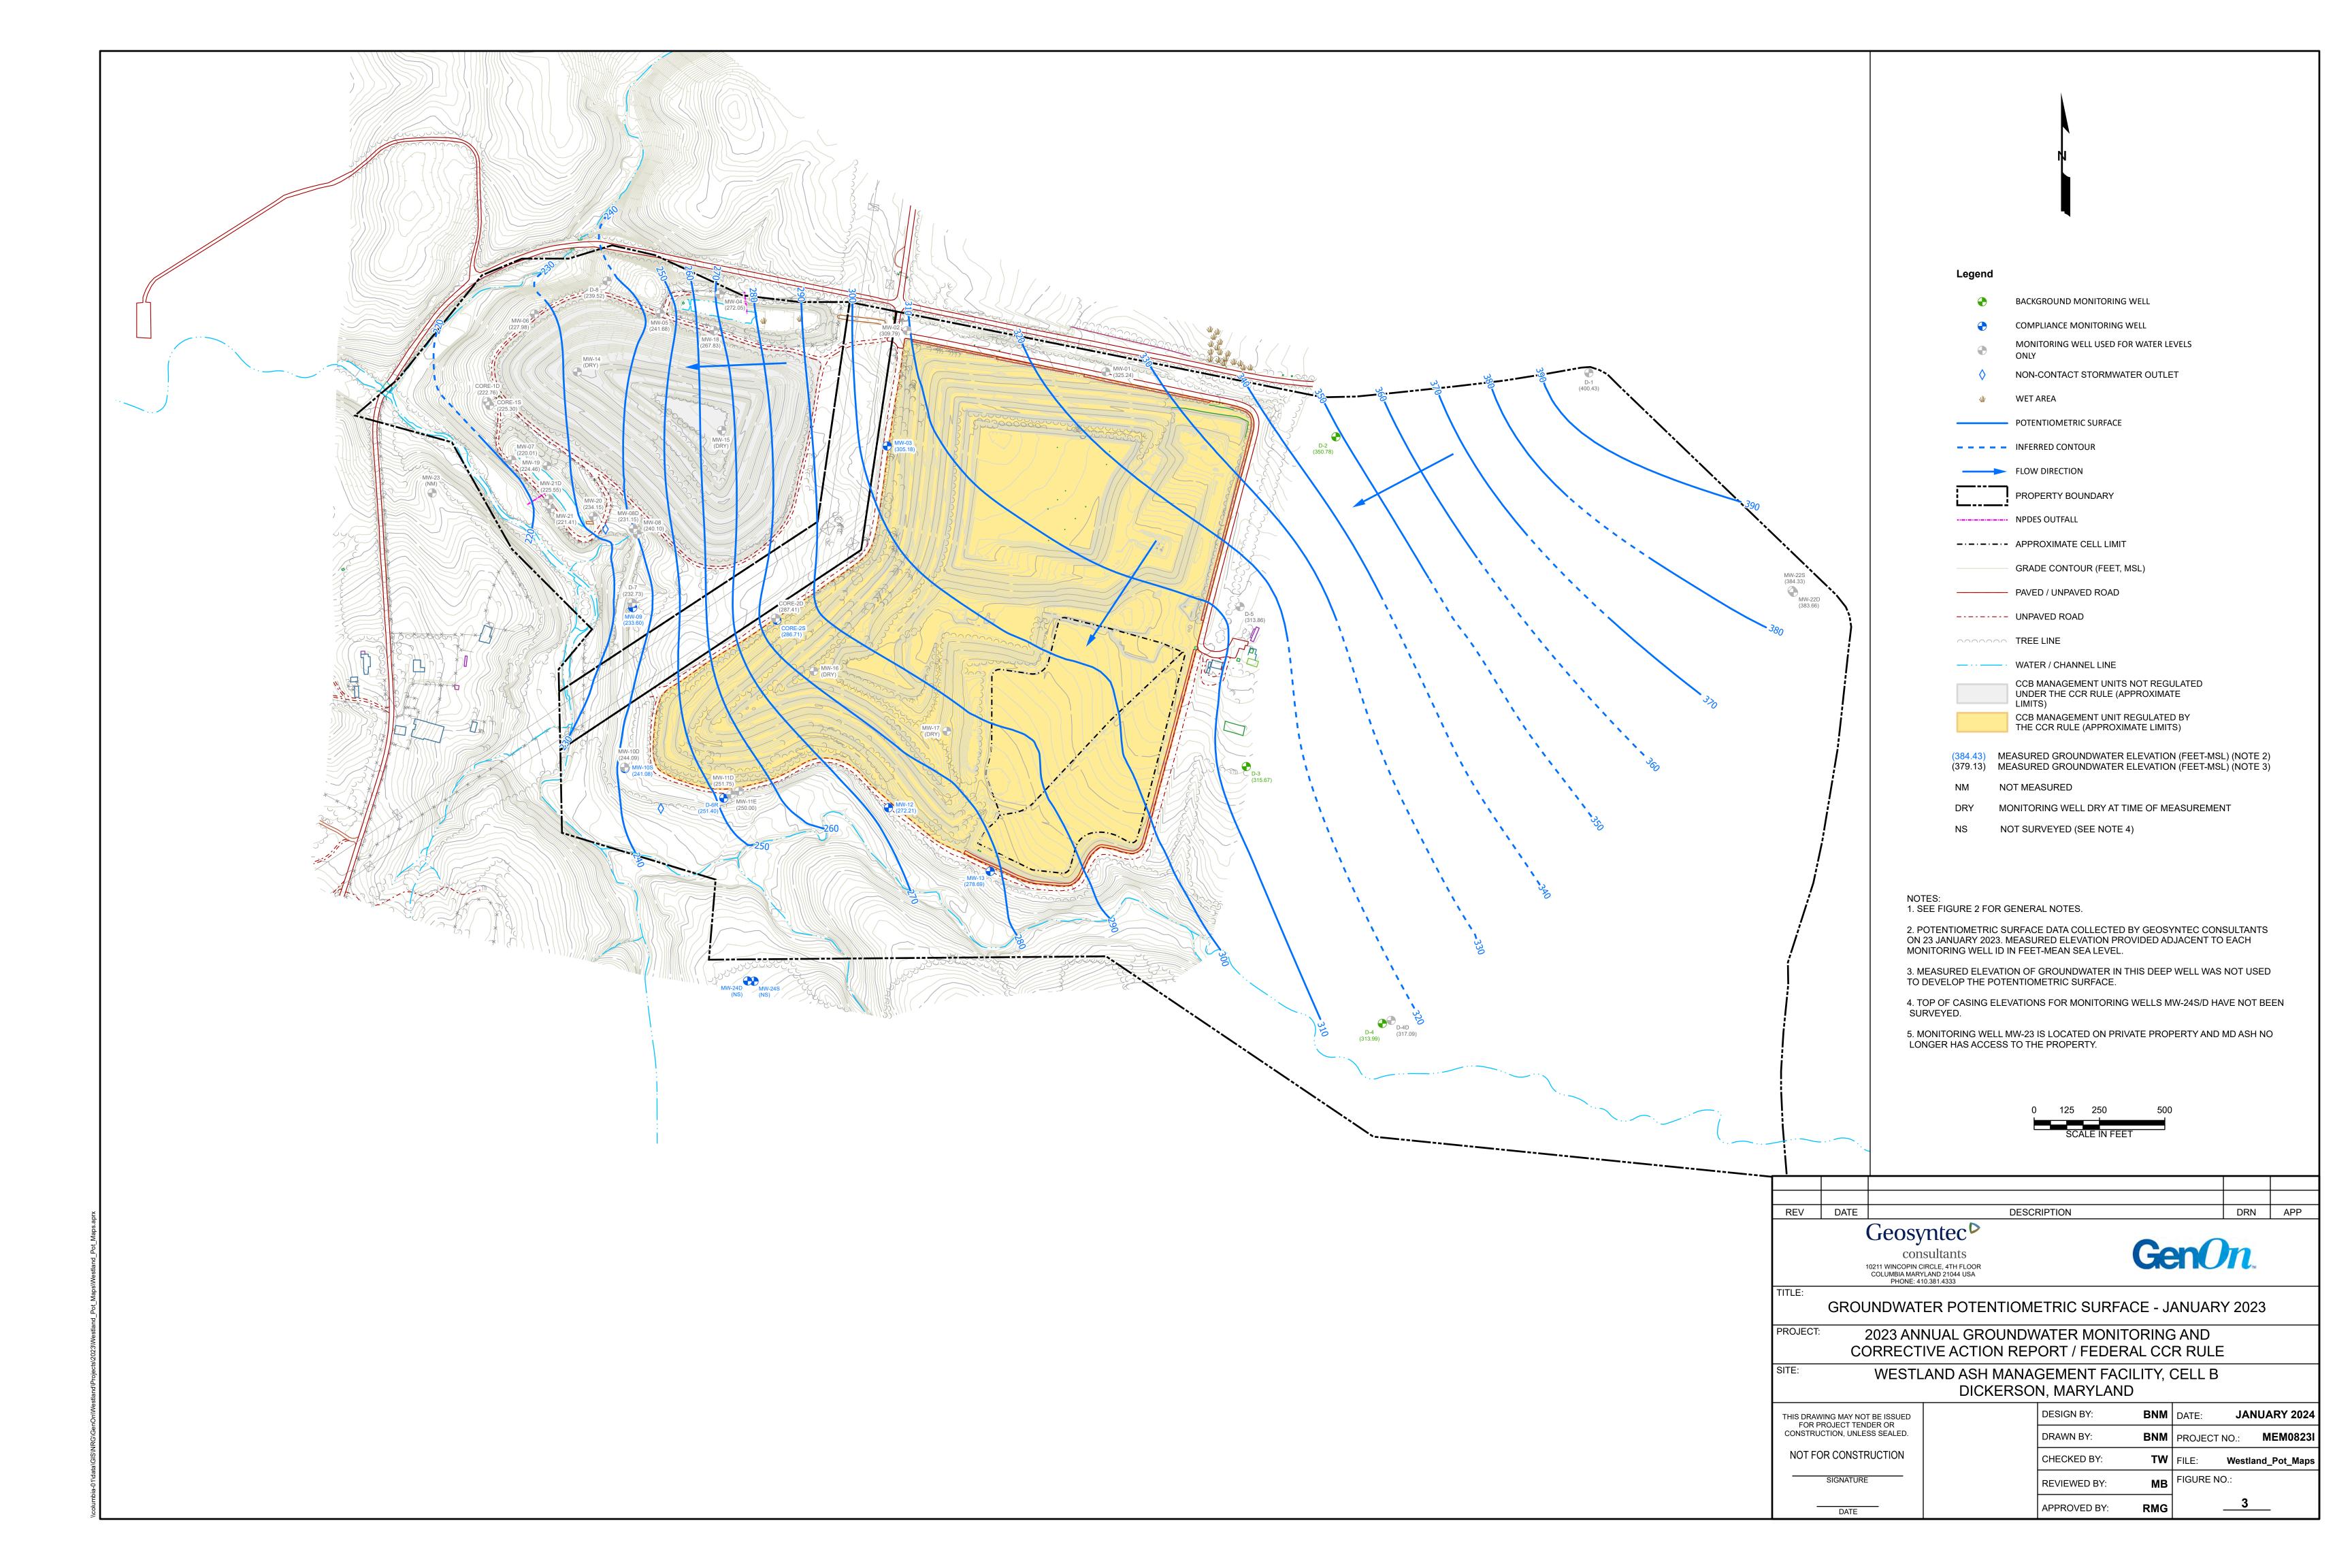

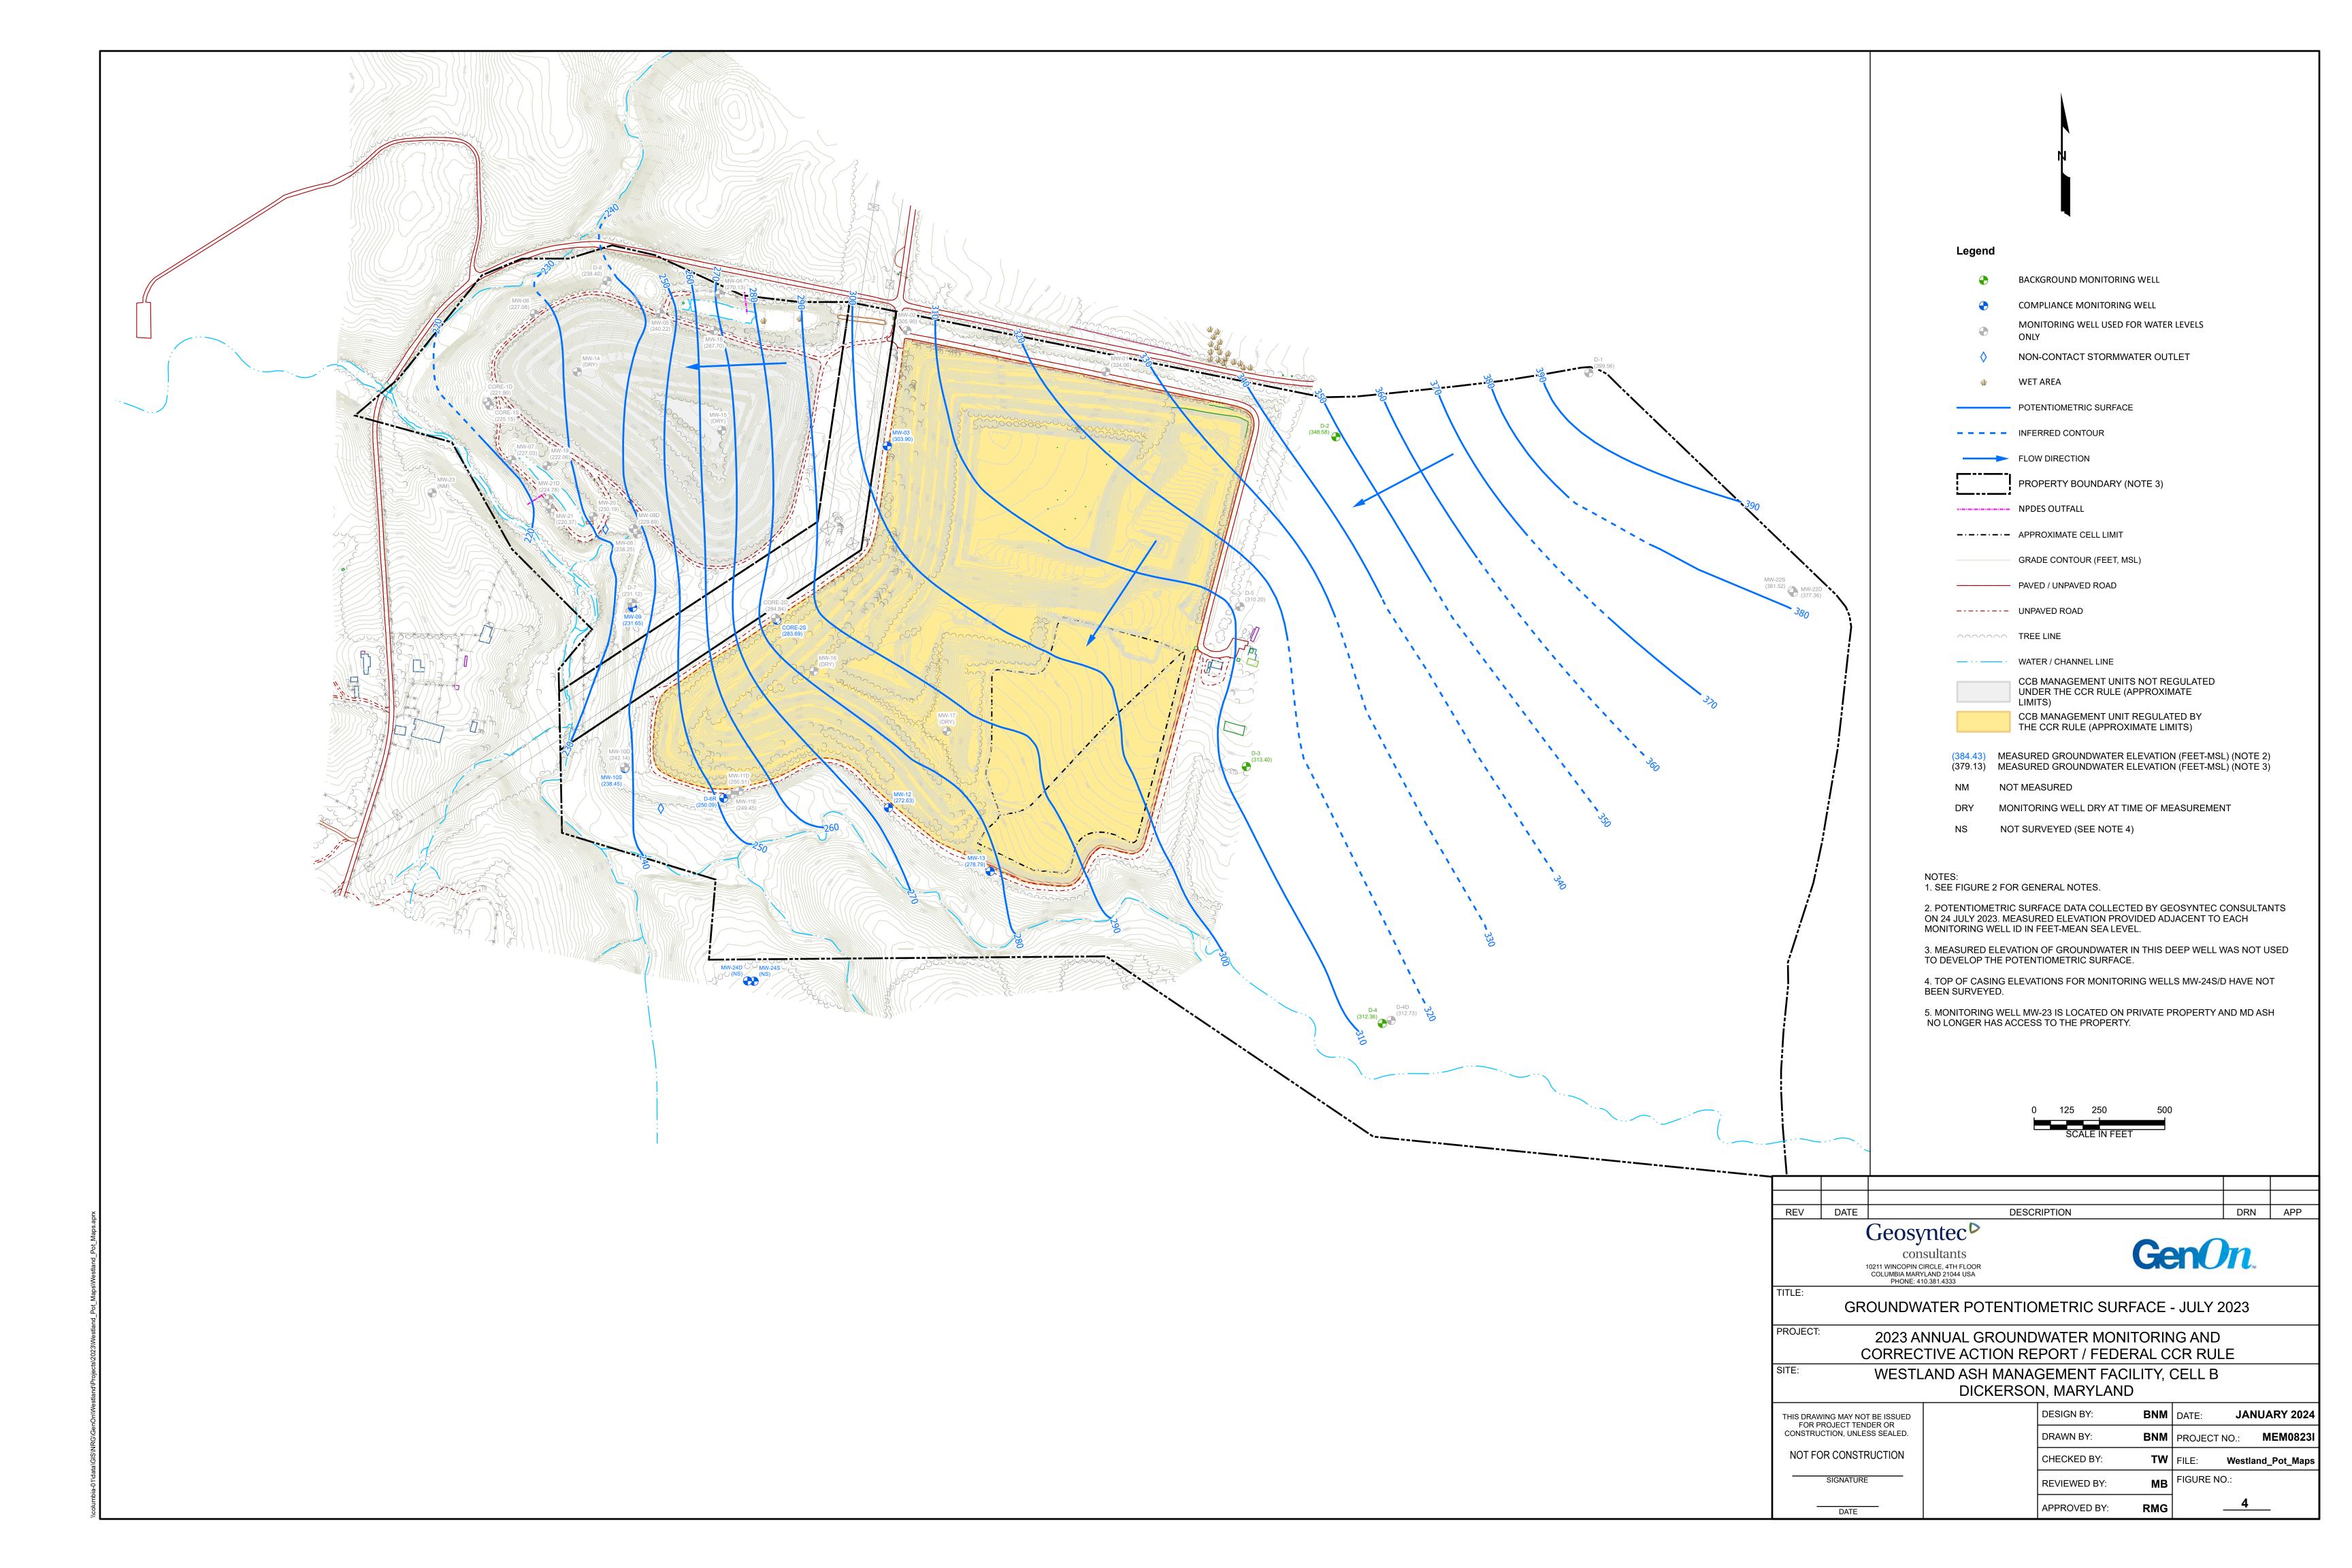




TABLE 1 WELL CONSTRUCTION DETAILS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

Well ID	Purpose	Permit Number	Installation Date	Northing (feet) Maryland State Plane 1900 NAD 1983	Easting (feet) Maryland State Plane 1900 NAD 1983	Ground Surface Elevation (ft msl)	Top of Casing Elevation (ft msl)	Inner Casing Diameter (inches)	Top of Sand Pack (ft bgs)	Screen Interval (ft bgs)	Screen Length (feet)	Screen Slot Size (inch)
CORE-2S	Compliance	MO-15-0119	6/30/2015	555694.88	1181659.23	298.07	300.82	2	33.0	35-45	10	0.010
D-2	Background	Unknown	6/1981	556397.52	1183798.46	358.37	366.03	4	32.0	110-120	10	0.010
D-3	Background	Unknown	6/1981	555135.30	1183455.78	359.32 [1]	361.82	4	40.0	86-96	10	0.010
D-4	Background	Unknown	6/1981	554151.88	1183976.22	335.41 [1]	337.91	4	Unknown	125-135	10	0.010
D-6R	Compliance	Unknown	6/2002	555014.92	1181455.87	277.90	281.075	4	51.0	55-70	15	Unknown
MW-03	Compliance	MO-15-0078	7/2/2015	556361.94	1182081.25	309.96	312.48	2	48.0	50-60	10	0.010
MW-09	Compliance	MO-15-0084	8/4/2015	555744.29	1181107.48	271.00	273.9	2	58.0	60-70	10	0.010
MW-10S	Compliance	MO-15-0100	6/29/2015	555127.15	1181077.31	268.29	271.03	2	36	38-48	10	0.010
MW-12	Compliance	MO-15-0106	8/6/2015	554978.07	1182086.13	293.26	296.11	2	32.0	34-44	10	0.010
MW-13	Compliance	MO-15-0107	8/7/2015	554733.88	1182475.50	308.02	310.77	2	48.0	50-60	10	0.010
MW-24D	Nature/Extent	MO-20-0014	9/21/2021	NS	NS	NS	NS	2	231.0	234-249	15	0.010
MW-24S	Nature/Extent	MO-20-0015	9/27/2021	NS	NS	NS	NS	2	111.0	114-124	10	0.010

Notes:

ft msl feet above mean sea level ft bgs feet below ground surface

NS Not Surveyed

[1] Elevation is an estimated value

TABLE 2 SUMMARY OF BASELINE MONITORING EVENTS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

Monitoring Program:										Ba	seline Mon	itoring									
Monitoring Event:		3Q 2015			4Q 2015			1Q 2016			2Q 2016			3Q 2016			4Q 2016			1Q 2017	
Sample Date:	Jul-15	Aug-15	Sep-15	Oct-15	Nov-15	Dec-15	Jan-16	Fob-16	Mar-16	Apr-16	May-16	Jun-16	Jul-16	Aug-16	Sep-16	Oct-16	Nov-16	Dec-16	Jan-17	Feb-17	Mar-17
Well ID	Jui-13	Aug-13	3ep-13	001-15	1404-12	Dec-13	Jaii-10	Len-10	IVIAI-10	Apr-10	Way-10	Juli-10	Jul-10	Aug-10	3ep-10	OCI-10	1404-10	Dec-10	Jaii-17	Len-11	Iviai-17
Background Wells																					
D-2			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
D-3			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
D-4			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
Compliance Wells																					
CORE-2S			III,IV [1,2]			III,IV [1,2]		III,IV [1,2]		III,IV				III,IV		III,IV			III,IV		
D-6R			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
MW-03			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
MW-09			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
MW-10S			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
MW-12			III,IV			III,IV		III,IV		III,IV				III,IV		III,IV			III,IV		
MW-13			III,IV			III,IV		III,IV		III,IV				III,IV			III,IV		III,IV		

Monitoring Program:				Baseline l	Monitoring		
Monitoring Event:		2Q 2017			3Q 2017		Total Baseline
Sample Date:	Apr-17	May-17	Jun-17	Jul-17	Aug-17	Sep-17	Sampling Events
Well ID	Api-ii	Iviay-11	Juli-17	Jui-17	Aug-17	Sep-17	[4]
Background Wells							
D-2	III,IV						8
D-3	III,IV						8
D-4	III,IV						8
Compliance Wells							
CORE-2S [5]	III,IV	III,IV [3]			III,IV [3]	III,IV [3]	10
D-6R	III,IV						8
MW-03	III,IV						8
MW-09	III,IV						8
MW-10S	III,IV						8
MW-12	III,IV		·				8
MW-13	III,IV						8

Notes:

- III Groundwater samples collected for laboratory analysis of 40 CFR 257 Appendix III parameters.
- IV Groundwater samples collected for laboratory analysis of 40 CFR 257 Appendix IV parameters.
- [1] Fluoride inadvertantly omitted.
- [2] Radium inadvertantly omitted.
- [3] Location was sampled for fluoride and radium, only.
- [4] All background and compliance monitoring wells met the minimum number of samples collected.
- [5] Monitoring well Core-2S was sampled on 10 different sampling events, which resulted in 8 complete sample sets.

TABLE 3 SUMMARY OF DETECTION/ASSESSMENT MONITORING EVENTS

Monitoring Program:		Detec	tion Monit	toring							Asses	ssment Mo	nitoring						
Monitoring Event:		4Q 2017		Total Detection		1Q 2018			2Q 2018			3Q 2018			4Q 2018			1Q 2019	
Sample Date:	Oct-17	Nov-17	Dec-17	Sampling Events	Jan-18	Feb-18	Mar-18	Apr-18	May-18	Jun-18	Jul-18	Aug-18	Sep-18	Oct-18	Nov-18	Dec-18	Jan-19	Feb-19	Mar-19
Well ID	OCI-17	1404-17	Dec-17	Camping Events	Jaii-10	160-10	IVIAI-10	Api-io	Iviay-10	Juli-10	Jui-10	Aug-10	3ep-10	OC1-10	1404-10	Dec-10	Jaii-13	160-19	IVIAI-13
Background Wells																			
D-2	Ш			1		III,IV			III,IV			III,IV						III,IV	
D-3	III			1		III,IV			III,IV			III,IV						III,IV	
D-4	III			1		III,IV			III,IV			III,IV						III,IV	
Compliance Wells																			
CORE-2S	III			1		III,IV			III,IV			III,IV						III,IV	
D-6R	III			1		III,IV			III,IV			III,IV						III,IV	
MW-03	III			1		III,IV			III,IV			III,IV						III,IV	
MW-09	III			1		III,IV			III,IV			III,IV						III,IV	
MW-10S	III			1		III,IV			III,IV			III,IV						III,IV	
MW-12	III			1		III,IV			III,IV			III,IV						III,IV	
MW-13	III			1		III,IV			III,IV			III,IV						III,IV	

Monitoring Program:										Asses	ssment Mo	nitorina									
		2Q 2019		1	3Q 2019		<u> </u>	4Q 2019		1.000	1Q 2020			2Q 2020			20 2020			40 2020	
Monitoring Event:		2Q 2019			3Q 2019			4Q 2019	ı		TQ 2020			ZQ Z0Z0			3Q 2020	1		4Q 2020	
Sample Date:	Apr-19	May-19	Jun-19	Jul-19	Aug-19	Sep-19	Oct-19	Nov-19	Dec-19	Jan-20	Feb-20	Mar-20	Apr-20	May-20	Jun-20	Jul-20	Aug-20	Sep-20	Oct-20	Nov-20	Dec-20
Well ID	7 tp: 10	may 10	ouii io	our ro	/tug io	COP 10	001.10	1101 10	200 10	5411 25	1 00 20	mai 20	7 (p. 20	may 20	0dii 20	04. 20	Aug 20	COP 20	00: 20	.101 20	200 20
Background Wells																					
D2						III,IV					III,IV						III,IV				
D3					III,IV						III,IV						III,IV				
D4						III,IV					III,IV						III,IV				
Compliance Wells																					
D-6R						III,IV					III,IV						III,IV				
MW-03						III,IV					III,IV						III,IV				
MW-09						III,IV					III,IV						III,IV				
MW-10S						III,IV					III,IV						III,IV				
MW-12						III,IV					III,IV						III,IV				
MW-13						III,IV					III,IV						III,IV				

Monitoring Program:										Asses	ssment Mo	nitoring									
Monitoring Event:		1Q 2021			2Q 2021			3Q 2021			4Q 2021			1Q 2022			2Q 2022			3Q 2022	
Sample Date: Well ID	Jan-21	Feb-21	Mar-21	Apr-21	May-21	Jun-21	Jul-21	Aug-21	Sep-21	Oct-21	Nov-21	Dec-21	Jan-22	Feb-22	Mar-22	Apr-22	May-22	Jun-22	Jul-22	Aug-22	Sep-22
Background Wells																					
D2		III,IV						III,IV						III,IV						III,IV	
D3		III,IV						III,IV						III,IV						III,IV	
D4		III,IV						III,IV						III,IV						III,IV	
Compliance Wells																					
CORE-2S		III,IV						III,IV						III,IV						III,IV	
D-6R		III,IV						III,IV						III,IV						III,IV	
MW-03		III,IV						III,IV						III,IV						III,IV	
MW-09		III,IV						III,IV						III,IV						III,IV	
MW-10S		III,IV						III,IV						III,IV						III,IV	
MW-12		III,IV						III,IV						III,IV						III,IV	
MW-13		III,IV						III,IV						III,IV						III,IV	

TABLE 3 SUMMARY OF DETECTION/ASSESSMENT MONITORING EVENTS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

Monitoring Program:								Asses	sment Mo	nitoring						
Monitoring Event:		4Q 2022			1Q 2023			2Q 2023			3Q 2023			4Q 2023		Total Assessment
Sample Date:	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	Apr-23	May-23	Jun-23	Jul-23	V110-33	Sep-23	Oct-23	Nov-23	Dec-23	Sampling Events
Well ID	OCI-22	NOV-ZZ	Dec-22	Jaii-23	reu-23	IVIAI-23	Apr-23	Iviay-23	Juli-23	Jui-23	Aug-23	3ep-23	OCI-23	1404-23	Dec-23	Sampling Events
Background Wells																
D2				III,IV						III,IV						13
D3				III,IV						III,IV						13
D4				III,IV						III,IV						13
Compliance Wells																
CORE-2S				III,IV						III,IV						13
D-6R				III,IV						III,IV						13
MW-03				III,IV						III,IV						13
MW-09				III,IV						III,IV						13
MW-10S				III,IV						III,IV						13
MW-12				III,IV						III,IV						13
MW-13				III,IV						III,IV						13

Monitoring Program:										Dete	ection Mon	itoring									
Monitoring Event:		1Q 2022			2Q 2022			3Q 2022			4Q 2022			1Q 2023			2Q 2023			3Q 2023	
Sample Date: Well ID	Jan-22	Feb-22	Mar-22	Apr-22	May-22	Jun-22	Jul-22	Aug-22	Sep-22	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	Apr-23	May-23	Jun-23	Jul-23	Aug-23	Sep-23
Off-site Nature and Ext	tent of Cor	ntaminatio	n Monitori	ing Wells																	
MW-24D [5]								III,IV					III,IV						III,IV		
MW-24S [5]		III,IV						III,IV					III,IV						III,IV		

Monitoring Program:		Detec	tion Monit	oring
Monitoring Event:		4Q 2023		Total Detection
Sample Date:	Oct-23	Nov-23	Dec-23	Total Detection Sampling Events
Well ID	001-23	1404-23	Dec-23	Sampling Events
Off-site Nature and Ex	tent of Co	ntaminatio	n Monitori	ng Wells
MW-24D [5]				3
MW-24S [5]				4

Notes:

III Groundwater samples collected for laboratory analysis of 40 CFR 257 Appendix III parameters. IV Groundwater samples collected for laboratory analysis of 40 CFR 257 Appendix IV parameters.

TABLE 4 GROUNDWATER ELEVATION MEASUREMENTS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

Well ID	Top of Casing Elevation [1] (ft msl)	Depth to Water Measurement Date	Depth to Water (ft btoic)	Groundwater Elevation (ft msl)
CORE-2S	300.82	1/23/2023	14.11	286.71
CORE-20	300.02	7/24/2023	17.13	283.69
D-2	366.03	1/23/2023	15.25	350.78
D-2	300.03	7/24/2023	17.45	348.58
D-3	361.82	1/23/2023	46.15	315.67
D-3	301.82	7/24/2023	48.42	313.40
D-4	337.91	1/23/2023	23.92	313.99
D-4	337.91	7/24/2023	25.55	312.36
D-6R	281.08	1/23/2023	29.68	251.40
D-6K	201.00	7/24/2023	30.99	250.09
MW-03	312.48	1/23/2023	7.30	305.18
10100-03	312.46	7/24/2023	8.58	303.90
MW-09	273.90	1/23/2023	40.30	233.60
10100-09	273.90	7/24/2023	42.25	231.65
MW-10S	271.03	1/23/2023	29.95	241.08
10100-103	27 1.03	7/24/2023	32.58	238.45
MW-12	296.11	1/23/2023	23.90	272.21
10100-12	290.11	7/24/2023	23.48	272.63
MW-13	310.77	1/23/2023	32.08	278.69
10100-13	310.77	7/24/2023	31.98	278.79
MW-24D	[1]	1/23/2023	37.85	[1]
IVIVV-24D	ניו	7/24/2023	38.87	[1]
MW-24S	[4]	1/23/2023	63.75	[1]
10100-243	[1]	7/24/2023	67.95	[1]

Notes:

ft msl feet above mean sea level

ft btoic feet below top of inner case

NM Not Measured

 Survey data not yet collected for new wells MW-24D and MW-24S; therefore, water level elevations are not estimated.

TABLE 5 APPENDIX III ANALYTICAL DATA - BACKGROUND WELLS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

	Analyte:	Boron	Calcium	Chloride	Fluoride	рН	Sulfate	TDS
Well ID	Sample Date	μg/L	mg/L	mg/L	mg/L	S.U.	mg/L	mg/L
	2/6/2018	<10.1 U	36.6	12.1	<0.25 U	7.7	16.7	189
	5/3/2018	<10.1 U	39.4	11.3	<0.25 U	7.8	16.9	207
	8/8/2018	<12.0 U	39.5	14.1	<0.25 U	8.0	15.3	174
	2/18/2019	16.7 J	37.8	10.3	<0.25 U	7.9	15.0	190
	9/4/2019	11.6 J	40.2	12.3 J	<0.25 U	8.0	15.3	196
	2/19/2020	<12.0 U	40.5	11.6	<0.25 U	7.9	15.7	180
D-2	8/21/2020	<12.0 U	37.0	13.0	<0.25 U	7.8	16.0	200
	3/3/2021	19.0 J	39.0	13.0	<0.25 U	7.7	16.0	180
	8/16/2021	18.0 J	39.0	12.0	0.07 J	7.6	15.0	180
	2/7/2022	4.70 J	40.0	13.0	0.05 J	7.5	16.0	250
	8/4/2022	9.60 J	41.0	12.0	0.03 J	7.9	15.0	430
	1/26/2023	7.30 J	41.0	13.0	0.08	8.3	16.0	150
	7/27/2023	4.70 J	40.0	13.0	0.05	7.4	16.0	260 J
	2/6/2018	<10.1 U	47.4	15.0	<0.25 U	7.9	23.6	241
	5/4/2018	<10.1 U	54.4	17.5	<0.25 U	8.1	24.9	241
	8/8/2018	<12.0 U	51.7	14.0	<0.25 U	8.1	22.9	262
	2/19/2019	<12.0 U	52.2	13.3	<0.25 U	8.3	21.2	259
	8/30/2019	<5.00 UJ	50.6	15.5	<0.25 U	7.7	25.9	238
	2/17/2020	<12.0 U	48.8	14.1	<0.25 U	7.9	25.4	269
	8/24/2020	<12.0 U	51.0	14.0	<0.25 U	7.8	23.0	240
D-3	3/2/2021	<12.0 U	46.0	13.0	0.26 J	8.0	23.0	240
	8/17/2021	<12.0 U	51.0	13.0	0.10 J-	8.1	24.0	250
	8/17/2021 [1]	<12.0 U	51.0	14.0	0.09 J	8.1	23.0	240
	2/7/2022	8.50 J	52.0	14.0	0.05	7.7	23.0	390
	8/5/2022	17.0 J	51.0	14.0	0.06	7.9	24.0	300
	1/26/2023	8.30 J	50.0	13.0	0.08	8.4	23.0	210
	1/26/2023 [1]	18.0 J	51.0	13.0	0.08	8.4	23.0	230
	7/27/2023	8.90 J	49.0	13.0	0.05 J	7.5	25.0	280 J-
	2/6/2018	27.7 J	NS	9.70	<0.25 U	7.4	15.3	221
	5/4/2018	27.1 J	52.9	12.0	<0.25 U	8.2	15.9	239
	5/4/2018 [1]	12.9 J	51.5	8.70	<0.25 U	8.2	14.5	221
	8/9/2018	<12.0 U	51.0	10.5	<0.25 U	8.3	16.1	192
	2/15/2019	12.4 J	52.1	7.40	<0.25 U	8.1	11.4	199
	9/4/2019	16.3 J	51.3	10.7 J	<0.25 U	7.9	13.1 J	209
	2/18/2020	<12.0 U	51.6	10.8	<0.25 U	8.0	15.5	195
D-4	8/20/2020	16.0 J	50.0	12.0	<0.25 U	7.8	14.0	210
	8/20/2020 [1]	12.0 J	48.0	11.0	<0.25 U	7.9	14.0	200
	3/4/2021	<12.0 U	49.0	12.0	0.27 J	8.1	19.0	180
	8/17/2021	<12.0 U	51.0	10.0	<0.25 U	8.1	13.0	210
	2/8/2022	9.30 J	51.0	10.0	0.04 J	7.9	13.0	190
	8/3/2022	<20.0 U	53.0	11.0	0.04 J	8.0	13.0	290
	1/24/2023	5.70 J	50.0	11.0	0.07	8.1	13.0	190
	7/25/2023	10.0 J	51.0	12.0	<0.05 U	7.5	13.0	110

Notes:

μg/L micrograms per Liter

mg/L milligrams per Liter

- S.U. Standard Units
 - B Analyte detected in sample and method blank.
 - H Sample was prepped or analyzed beyond the specified holding time
 - J Constituent detected below reporting limit and is an estimated value.
 - J- The result is an estimated quantity, but the result may be biased low.
- UJ The analyte was analyzed for, but was not detected. The reported quantitation limit is approximate and may be inaccurate or imprecise
- U Constituent not detected above method detection limit and is shown as less than the reporting limit.
- [1] Duplicate sample collected.

	Analyte:	Boron	Calcium	Chloride	Fluoride	рН	Sulfate	TDS
	UPL [1]	25	53.4	17.5	[2]	7.02 - 8.45	25.4	325
Well ID	Sample Date	μg/L	mg/L	mg/L	mg/L	S.U.	mg/L	mg/L
1101112	10/26/2017	317	199	181	<0.50 U	7.6	228	1,030
	2/14/2018	421	228	206	<0.50 U	7.6	232	1,040
	5/4/2018	371	234	195	<0.50 U	8.0	227	1,140
	8/8/2018	242	198	182	<0.50 U	7.9	202	728
	2/14/2019	256	191	188	<0.50 U	8.1	189	638
	9/5/2019	374	241	225	<0.50 U	7.8	246	842
	2/14/2020	294	210	196	<0.50 U	8.0	221	712 J+
Core-2S	2/14/2020 [3]	312	216	179	<0.50 U	7.7	201	820
	8/24/2020 2/26/2021	340 300	230 230	290 250	<0.50 U <0.50 U	7.8 7.8	270 J 300 J	850 780
	8/10/2021	310	230	210	<0.50 U	7.7	250	860
	2/3/2022	400	230	250	<0.25 U	7.7	270	1,000
	2/3/2022 [3]	420	230	280	<0.25 U	7.7	310	1,000
	8/3/2022	500	270	240	<0.25 U	8.0	300	1,600
	1/23/2023	360	230	230	<0.25 U	8.1	250	910 J-
	7/26/2023	500	260	250	<0.25 U	7.4	300	1,400
	10/27/2017	5,180	676	338	<0.50 U	7.3	1,330	2,860
	2/6/2018	5,410	657	309	<0.50 U	7.4	1,330	2,280
	5/3/2018	5,650	648	288	<0.50 U	7.3	1,170	2,730
	8/10/2018	5,490	733	280	<0.50 U <0.50 U	7.6	1,250	2,230
	2/14/2019 9/5/2019	5,430 4,060	628 482	413 257	<0.50 U <0.50 U	7.8 7.8	1,180 852	2,100 1,810
	2/17/2020	4,780	537	243	<0.50 U	7.4	1,040	1,880
D-6R	8/19/2020	4,900	540	230	<0.50 U	7.5	2,200	1,200
	2/25/2021	5,900	660	250	<0.50 U	7.5	1,200	2,500
	8/11/2021	6,100	730	240	<0.50 U	7.4	1,200	2,500
	2/7/2022	6,300	690	270	<0.50 U	7.1	1,200	2,400
	8/5/2022	5,900	680	280	<0.50 U	7.6	1,300	820 [4]
	1/23/2023	6,600	670	270	<0.50 U	7.4	1,200	660 [4] J-
	7/27/2023	5,900	580	300	<0.50 U	6.8	1,500	2,700 J-
	10/26/2017	10,700	494	362	<0.50 U	6.7	1,330	2,640
	2/13/2018	9,750	463	264	<0.50 U	7.1	1,301	2,700
	2/13/2018 [3] 5/4/2018	9,390 9,980	443 460	302 209	<0.50 U <0.50 U	7.1 7.0	1,350 1,130	2,370 2,380
	8/13/2018	8,510	341	165	<0.50 U	7.6	980	1,460
	2/15/2019	7,340	274	101	<0.50 U	7.2	567	562
	9/4/2019	13,800	406	160	<0.50 U	7.5	989	1,900
MW-03	2/14/2020	10,200	330	116	0.88	6.9	835	1,470
10100-03	8/21/2020	14,000	400	250	<0.50 U	7.0	1,200	2,000
	2/26/2021	9,700	310	110	<0.50 U	7.0	1,000	1,400
	8/16/2021	17,000	400	150	0.12	6.7	1,200 J	2,200
	2/3/2022	14,000	400	160	<0.25 U	6.8	1,200	64
	8/4/2022	14,000 14,000	420 400	170 170	<0.50 U <0.50 U	7.1 7.2	1,300 J- 1,300	780 J
	8/4/2022 [3] 1/23/2023	12,000	330	120	<0.50 U 0.30	7.5	910	1,100 1,600 J-
	7/26/2023	14,000	390	140	<0.50 U	6.6	1,200 J-	2,000 J
	10/26/2017	2,580	276	95.2	<0.50 U	7.4	505	1,410
	2/14/2018	2,660	289	92.9	<0.50 U	7.5	244	1,220
	5/3/2018	2,760	292	85.5	<0.50 U	7.8	475	1,280
	8/9/2018	2,680	287	91.4	<0.50 U	7.6	498	1,050
	2/19/2019	2,710	279	91.4	<0.50 U	7.0	447	996
	9/4/2019	2,710	261	76.6	<0.50 U	7.9	387	1,030
MW-09	2/17/2020	2,520	226	73.6	<0.50 U	7.7	342	918
	8/20/2020	2,300	210	73.0	<0.50 U	7.6	500	920
	3/2/2021	2,500	230	69.0	0.26 J	7.8	330	890
	8/10/2021	2,300	210	57.0	<0.50 U	7.8	310	870
	2/8/2022	2,200	200	61.0	<0.25 U	7.8	310	800
	8/3/2022	2,300	220	64.0	<0.25 U	7.8	320	920
	1/26/2023	2,300	200	62.0	0.19 J	8.1	310	870
	7/26/2023	2,300	200	62.0	<0.25 U	7.4	320	880

	Analyte:	Boron	Calcium	Chloride	Fluoride	рН	Sulfate	TDS
	UPL [1]	25	53.4	17.5	[2]	7.02 - 8.45	25.4	325
Well ID	Sample Date	μg/L	mg/L	mg/L	mg/L	S.U.	mg/L	mg/L
	10/26/2017	311	353	86.5	<0.50 U	7.3	608	1,290
	2/14/2018	331	351	81.4	<0.50 U	7.4	587	1,260
	5/3/2018	310	334	54.9	<0.50 U	7.7	409	1,190
	5/3/2018 [3]	314	341	68.0	<0.50 U	7.6	522	1,260
	8/10/2018	305	327	66.9	<0.50 U	7.7	516	1,240
	2/18/2019	309	307	68.3	<0.50 U	7.9	498	1,030
	9/3/2019	411	367	77.4	<0.50 U	7.6	556	1,340
MW-10S	2/14/2020	386	349	74.2	<0.50 U	7.6	558	954
	8/21/2020	450	330	140 J	<0.50 U	7.7	670	1,300
	3/1/2021	400	310	67.0	0.25 J	7.7	520	1,100
	8/11/2021	350	250	65.0	<0.1 U	7.5	520	1,200
	2/7/2022	440	310	69.0	<0.25 U	7.4	550	1,200
	8/2/2022	490	370	69.0	<0.25 U	7.7	570	1,300
	1/24/2023	460	310	72.0	0.19 J	8.1	560	1,000
	7/25/2023	450	270	66.0	<1.0 U	6.8	1,900 [4]	1,100
	10/26/2017	1,990	371	101	<0.50 U	6.7	991	1,990
	2/14/2018	8,050	378	107	<0.50 U	6.8	912	1,810
	5/4/2018	6,280	386	90.2	<0.50 U	7.0	885	1,850
	8/13/2018	5,450	323	67.3	<0.50 U	7.6	716	1,410
	2/19/2019	7,620	376	66.0	<0.50 U	7.6	872	1,680
	9/5/2019	9,290	445	65.7	<0.50 U	7.2	890	1,780
MW-12	2/17/2020	9,000	384	113	<0.50 U	6.9	1,040	1,620
	8/19/2020	8,300	360	68.0	<0.50 U	7.1	1,100	1,900
	2/25/2021	7,000	330	50.0	<0.50 U	7.0	740	1,400
	8/11/2021 2/3/2022	9,400 11,000	370 370	63.0 74.0	0.11 <0.25 U	7.1 6.8	1,100 1,000	2,000 1,700
	8/4/2022	9,800	370	66.0	<0.25 U	7.2	1,100	620 [4]
	1/26/2023	8,800	340	56.0	0.25	8.3	900	1,600
	7/26/2023	10,000	360	58.0	0.14 J	6.7	1,100	1,800 J
	10/30/2017	<50.0 U	44.5	11.0	<0.25 U	7.4	24.9	256
	10/30/2017 [3]	<50.0 U	45.1	10.7	<0.50 U	7.6	24.6	221
	2/13/2018	<50.0 U		12.6	<0.50 U	8.0	31.4	371
	5/4/2018	21.3 J	50.7	11.3	<0.50 U	8.1	30.8	225
	8/13/2018	<50.0 U	48.4	11.5	<0.50 U	8.2	27.9	221
	2/19/2019	15.8 J	53.2	14.2	<0.50 U	7.9	38.1	284
	9/5/2019	35.6 J	51.3	11.3	<0.50 U	8.0	27.7	243
	9/5/2019 [3]	16.8 J	47.3	10.8	<0.50 U	8.0	24.4	244
NAVA 40	2/14/2020	<30.0 U	53.3	12.5	<0.50 U	7.9	36.0	244
MW-13	8/19/2020	18.0 J	47.0	13.0	<0.50 U	7.8	34.0	170
	2/25/2021	18.0 J	55.0	14.0	<0.50 U	7.9	40.0	220
	2/25/2021 [3]	17.0 J	55.0	13.0	<0.50 U	7.9	35.0	200
	8/11/2021	<50.0 U	51.0	13.0	0.12 J+	7.7	35.0	240
								240
	2/3/2022	19.0	55.0	13.0	0.08	7.8	39.0	
	8/4/2022	43.0	52.0	13.0	0.09	7.7	37.0	43.0
	1/26/2023	39.0	58.0	13.0	0.11	8.4	42.0	300
	7/25/2023	18.0 J	53.0	13.0	0.09	6.6	38.0	230
	7/25/2023 [3]	4.6 J	58.0	23.0	0.09	6.8	11.0	130

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

	Analyte:	Boron	Calcium	Chloride	Fluoride	pН	Sulfate	TDS
	UPL [1]	25	53.4	17.5	[2]	7.02 - 8.45	25.4	325
Well ID	Sample Date	μg/L	mg/L	mg/L	mg/L	S.U.	mg/L	mg/L
	8/2/2022	18.0 J	26.0	34.0	0.77	12.5 [6]	160	760 [6]
MW-24D [5]	1/24/2023	18.0 J	26.0	31.0	0.67	13.0 [6]	160	440 [6]
	7/24/2023	23.0	26.0	35.0	<2.5 U	12.6 [6]	200	8,700 [6] J-
	2/8/2022	92	78.0	100	0.83 J	11.9 [6]	420	1700 [6]
MW-24S [5]	8/2/2022	120	78.0	110	0.57 J	11.7 [6]	480	1100 [6]
10100-243 [3]	1/24/2023	110	46.0	130	1.30	11.9 [6]	560	59 [4]
	7/24/2023	160	140	150	0.85	11.6 [6]	720	860 [6]

Notes:

- Concentration is a statistically significant increase (SSI) over the background concentration.
- **UPL** Upper prediction limit
- µg/L micrograms per Liter
- mg/L milligrams per Liter
- S.U. Standard Units
 - J Constituent detected below reporting limit and is an estimated value.
 - J+ The result is an estimated quantity, but the result may be biased high.
 - J- Constituent detected below reporting limit; result is an estimated concentration with a low bias.
 - U Constituent not detected above method detection limit and is shown as less than the reporting limit.
 - [1] Subject to change as additional data are generated. Calculations provided in Statistical Analysis Calculations Package for Background Groundwater Cell B, Westland Ash Storage Facility, Dickerson, MD (Geosyntec, 2018).
 - [2] The Double Quantification Rule (DQR) is used for background data sets with no detections. A confirmed exceedance is registered if any well-constituent pair in the '100% non-detect' group exhibits quantified measurements (i.e., at or above the reporting limit [RL]) in two consecutive sample and resample events. (Unified Guidance, 2009 p.6.11). In Fall 2021, a new analytical laboratory was contracted for these analyses. The new laboratory's equipment uses a lower detection limit than the previous analytical laboratory. A new background concentration will be established once a sufficient data set is analyzed under the lower detection limits. Until that time, any detection below the existing DQR Reporting Limit, established at 0.5 mg/L for fluoride, should not be considered an SSI.
- [3] Duplicate sample collected.
- [4] The value is suspected to be erroneous because it is inconsistent with historical values
- [5] MW-24D and MW-24S were installed as part of the nature and extent of contamination investigation to monitor the potential presence of CCR constituents migrating offsite.
- [6] Result suspected to be elevated due to grout intrusion.

TABLE 7 APPENDIX IV ANALYTICAL DATA - BACKGROUND WELLS

	Analyte:	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt [1]	Fluoride	Lead
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	mg/L	μg/L
	2/14/2018	<0.45 U	0.84 J	329	<0.07 U	<0.15 U	<0.90 U	<1.7 U	<0.25 U	0.34 J
	5/3/2018	<0.45 U	<0.72 U	356	<0.07 U	<0.15 U	0.88 J	NS	<0.25 U	1.10
	8/8/2018	<0.41 U	<0.68 U	360	<0.09 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	2/18/2019	<0.41 U	<0.68 U	337	<0.09 U	<0.15 U	0.88 J	<1.5 U	<0.25 U	<1.10 U
	9/5/2019	0.42 J	<0.68 U	361	<0.09 U	<0.15 U	0.76 J	<1.5 U	<0.25 U	<1.10 U
	2/19/2020	<0.41 U	<0.68 U	353	<0.12 U	<0.15 U	2.20	<1.5 U	<0.25 U	0.40 J
D-2	8/21/2020	1.30	<0.68 U	340	<0.12 U	<0.15 U	0.73 J	<1.5 U	<0.25 U	0.57
	3/3/2021	0.64 J	<0.68 U	340	<0.12 U	<0.15 U	0.53 J	<1.5 U	<0.25 U	0.45 J
	8/16/2021	0.98 J	<0.68 U	370	<0.50 U	<0.50 U	0.72 J	<1.5 U	0.071 J	1.10
	2/7/2022	<5.00 U	<5.00 U	360	<3.50 U	<0.50 U	<7.50 U	<4.0 U	0.048 J	0.34 J
	8/4/2022	0.45 J	0.56 J	370	<0.70 U	<0.50 U	0.41 J	<4.0 U	0.027 J	0.34 J
	1/26/2023	<1.00 U	0.49 J	350	0.034 J	<0.50 U	2.00	<4.0 U	0.080	0.91 J
	7/27/2023	<1.00 U	0.46 J	370	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.050	0.20 J
	2/6/2018	<0.45 U	0.74 J	86.1	<0.07 U	<0.15 U	<0.90 U	<1.7 U	<0.25 U	1.10
	5/4/2018	0.46 J	<0.72 U	93.0	<0.07 U	<0.15 U	<0.90 U	NS	<0.25 U	0.95 J
	8/8/2018	<0.41 U	<0.68 U	95.0	<0.09 U	<0.15 U	0.78 J	<1.5 U	<0.25 U	<1.10 U
	2/19/2019	0.70 J	<0.68 U	105	<0.09 U	<0.15 U	0.77 J	<1.5 U	<0.25 U	1.50 J
	8/30/2019	0.54 J	<0.68 U <0.68 U	81.5	<0.09 U <0.12 U	<0.15 U	<0.70 U	<1.5 U <1.5 U	<0.25 U <0.25 U	<1.10 U
	2/17/2020	<0.41 U 0.45 J		93.9		<0.15 U <0.15 U	0.72 J <0.30 U			0.92
D-3	8/24/2020 3/2/2021	0.45 J <0.41 U	<0.68 U <0.68 U	96.0 100	<0.12 U <0.12 U	<0.15 U <0.15 U		<1.5 U <1.5 U	<0.25 U 0.26 J	0.95 1.40
D-3	8/17/2021	<0.41 U	<0.68 U	93.0	<0.12 U	<0.15 U	0.48 J 1.20 J	<1.5 U	0.26 J 0.10 J-	0.90
	8/17/2021 [4]	<0.41 U	<0.68 U	90.0	<0.12 U	<0.15 U	0.86 J	<1.5 U	0.10 J-	0.90
	2/7/2022	<5.00 U	<5.00 U	99.0	<3.50 U	<0.15 U	<7.50 U	<4.0 U	0.093 3	1.10
	8/5/2022	1.10	0.86 J	100	<0.70 U	<0.50 U	2.40 J+	<4.0 U	0.063	2.00
	1/26/2023	0.38 J	0.61 J	100	<0.70 U	<0.50 U	2.70 J	<4.0 U	0.077	1.30
	1/26/2023 [4]	0.41 J	0.67 J	100	<0.70 U	<0.50 U	3.80	<4.0 U	0.079	1.40
	7/27/2023	0.40 J	0.62 J	100	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.048 J	1.80
	2/6/2018	<0.45 U	<0.72 U	401	<0.07 U	<0.15 U	<0.90 U	<1.7 U	<0.25 U	0.13 J
	5/4/2018	<0.45 U	<0.72 U	428	<0.07 U	<0.15 U	1.30 J	NS	<0.25 U	1.80
	5/4/2018 [4]	<0.45 U	<0.72 U	426	<0.71 U	<0.15 U	1.80 J	NS	<0.25 U	1.80
	8/9/2018	<0.41 U	<0.68 U	468	<0.09 U	<0.15 U	0.92 J	<1.5 U	<0.25 U	<1.10 U
	2/15/2019	<0.41 U	<0.68 U	428	<0.09 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	9/4/2019	<0.41 U	<0.68 U	422	<0.09 U	<0.15 U	0.95 J	<1.5 U	<0.25 U	<1.10 U
	2/18/2020	<0.41 U	<0.68 U	417	<0.12 U	<0.15 U	0.97 J	<1.5 U	<0.25 U	<0.07 U
D-4	8/20/2020	<0.41 U	<0.68 U	410	<0.12 U	<0.15 U	2.90	<1.5 U	<0.25 U	0.08 J
	8/20/2020 [4]	<0.41 U	<0.68 U	400	<0.12 U	<0.15 U	3.30	<1.5 U	<0.25 U	<0.07 U
	3/4/2021	<0.41 U	<0.68 U	430	<0.12 U	<0.15 U	0.46 J	<1.5 U	0.27 J	0.33 J
	8/17/2021	<0.41 U	<0.68 U	400	<0.12 U	<0.15 U	<0.33 U	<1.5 U	<0.25 U	0.17 J
	2/8/2022	<5.00 U	<5.00 U	440	<3.50 U	<2.50 U	<7.50 U	<4.0 U	0.043 J	<5.00 U
	8/3/2022	<1.00 U	<1.00 U	440	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.042 J	0.23 J
	1/24/2023	<1.00 U	0.66 J	430	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.066	<1.00 U
	7/25/2023	<1.00 U	0.55 J	450	<0.70 U	<0.50 U	<1.50 U	<4.0 U	<0.050 U	0.19 J

TABLE 7 APPENDIX IV ANALYTICAL DATA - BACKGROUND WELLS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

	Analyte:	Lithium	Mercury	Molybdenum	Selenium	Thallium	Radium-226 [2]	Radium-228 [2]	Radium (226+228) [3]
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	pCi/L	pCi/L	pCi/L
	2/14/2018	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	<0.18 U	<0.09 U	<2.00 U
	5/3/2018	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	1.23	<0.91 U	2.73 J
	8/8/2018	<11.0 U	<0.05 U	<2.0 U	<0.65 U	<0.12 U	3.08	<0.54 U	4.58 J
	2/18/2019	<11.0 U	<0.05 U	<2.0 U	<0.65 U	<0.11 U	0.44 J	<0.57 U	1.94 J
	9/4/2019	<13.0 U	<0.05 U	<2.0 U	<0.65 U	<0.11 U	0.57 J	<0.82 U	2.07 J
	2/19/2020	<11.0 U	<0.06 U	<2.0 U	<0.28 U	<0.13 U	<0.33 U	<0.61 U	<2.00 U
D-2	8/21/2020	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	0.60 J	<-0.89 U	2.10 J
	3/3/2021	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	<0.314 U	<1.99 U	<2.00 U
	8/16/2021	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	0.313	<2.38 U	1.81 J
	2/7/2022	<30.0 U	0.12 J	<10 U	<5.00 U	<0.20 U	1.09	<0.518 U	<2.00 U
	8/4/2022	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.125 U	<1.25 U	<2.00 U
	1/26/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.456 U	2.28	2.78 J
	7/27/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	0.022 J	0.899	<0.464 U	2.40 J
	2/6/2018	11.0 J	<0.05 U	<3.4 U	<0.50 U	<0.12 U	<0.14 U	<0.96 U	<2.00 U
	5/4/2018	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	0.22 J	<-0.04 U	1.72 J
	8/8/2018	<11.0 U	<0.05 U	<2.0 U	<0.65 U	<0.12 U	<0.28 U	<0.54 U	<2.00 U
	2/19/2019	<11.0 U	<0.05 U	<2.0 U	<0.65 U	<0.11 U	<-0.10 U	<1.07 U	<2.00 U
	8/30/2019	14.4 J	<0.05 U	<2.0 U	<0.65 U	<0.11 U	1.01	<0.64 U	1.01 J
	2/17/2020	<11.0 U	<0.05 U	<2.0 U	<0.28 U	<0.13 U	0.35	<0.01 U	1.85 J
	8/24/2020	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	<0.15 U	<-0.04 U	<2.00 U
D-3	3/2/2021	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	<0.334 U	<1.64 U	<2.00 U
	8/17/2021	14.0 J	<0.08 U	<2.0 U	0.29 J	<0.13 U	<0.434 U	<1.48 U	<2.00 U
	8/17/2021 [4]	13.0 J	<0.08 U	<2.0 U	0.36 J	<0.13 U	0.311	<1.57 U	<2.00 U
	2/7/2022	13.0 J	<0.20 U	<10 U	<5.00 U	<0.20 U	<0.069 U	<0.936 U	<2.00 U
	8/5/2022	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.419 U	<0.613 U	<2.00 U
	1/26/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.194 U	<-0.06 U	<2.00 U
	1/26/2023 [4]	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	0.364	4.59	4.95 J
	7/27/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.093 U	2.30	2.80 J
	2/6/2018	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	<0.27 U	<-0.14 U	<2.00 U
	5/4/2018	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	1.11	<0.84 U	2.61 J
	5/4/2018 [4]	<9.00 U	<0.05 U	<3.4 U	<0.50 U	<0.12 U	11.6	<0.35 U	13.1
	8/9/2018	<11.0 U	<0.05 U	<2.0 U	<0.65 U	<0.11 U	2.70	<1.75 U	4.20 J
	2/15/2019	17.4 J	<0.05 U	<2.0 U	<0.65 U	<0.11 U	0.46 J	<0.38 U	1.96 J
	9/4/2019	<13.0 U	<0.05 U	<2.0 U	<0.65 U	<0.11 U	<0.22 U	<0.27 U	<2.00 U
	2/18/2020	<11.0 U	<0.05 U	<2.0 U	<0.28 U	<0.13 U	<0.47 U	<0.15 U	<2.00 U
D-4	8/20/2020	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	0.70 J	1.85 J	2.55 J
	8/20/2020 [4]	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	<0.39 U	<0.24 U	<2.00 U
	3/4/2021	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	<0.385 U	<1.53 U	<2.00 U
	8/17/2021	<11.0 U	<0.08 U	<2.0 U	<0.28 U	<0.13 U	0.417	<1.46 U	<2.00 J
	2/8/2022	<30.0 U	0.17 J	<10 U	<5.00 U	<1.00 U	0.925	1.77	2.70 J
	8/3/2022	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	0.529	<2.03 U	2.03 J
	1/24/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	<0.251 U	<2.48 U	<2.00 U
	7/25/2023	<30.0 U	<0.20 U	<10 U	<1.00 U	<0.20 U	0.843	1.44	2.28 J

Notes:

μg/L micrograms per Liter

mg/L milligrams per Liter

pCi/L picocurie per Liter

NS Not Sampled

- J Constituent detected below reportable quantitation limit; result is an estimated value.
- J- The result is an estimated quantity, but the result may be biased low.
- J+ The result is an estimated quantity, but the result may be biased high.
- U Constituent not detected above method detection limit.
- [1] Appendix IV constituent not detected in February 2018 full scan Assessment Monitoring event. Full Appendix IV list analytes were not analyzed in the May 2018 resampling event.
- [2] Radium values shown are the 'result' reported by lab, including non-detects shown with '<'.
- [3] The sum of Radium-226 + Radium-228 uses one-half the reporting limit (data not shown) for non-detect (<) values.
- [4] Duplicate sample collected.

	Analyte:	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt [4]	Fluoride	Lead
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	mg/L	μg/L
	2/14/2018	<0.45 U	<0.72 U	61.4	0.074 J	<0.15 U	1.20 J	<1.7 U	<0.25 U	0.19 J
	5/4/2018	<0.45 U	0.90 J	88.7	<0.09 U	<0.15 U	1.60 J	NS	<0.25 U	0.63 J
	8/8/2018	<0.41 U	<0.68 U	76.8	<0.07 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	2/14/2019	<0.41 U	<0.68 U	77.3	<0.09 U	<0.15 U	2.50 J	<1.5 U	<0.25 U	<1.10 U
	9/5/2019	<0.41 U	<0.68 U	73.5	<0.09 U	<0.15 U	0.91 J	<1.3 U	<0.25 U	<1.10 U
	2/14/2020	<0.41 U	<0.68 U	61.9	<0.12 U	<0.15 U	0.53 J	<1.5 U	<0.25 U	<0.07 U
Core-2S	2/14/20 [1]	<0.41 U	<0.68 U	63.6	<0.12 U	<0.15 U	0.57 J	<1.5 U	<0.25 U	<0.07 U
00.020	8/24/2020	<0.41 U	<0.68 U	61.0	<0.12 U	<0.15 U	<0.33 U	<1.5 U	<0.25 U	<0.07 U
	2/26/2021	<0.41 U	<0.68 U	71.0	<0.12 U	<0.15 U	1.30 J	<1.5 U	<0.25 U	0.48 J
	8/10/2021	0.48 J	0.85 J	85.0	0.14 J	<0.50 U	3.40	<1.5 U	<0.25 U	0.93
	2/3/2022 [1]	<1.00 UJ	<1.00 U	65.0	0.038 J	<0.50 U	<1.50 UJ	<4.0 U	<0.25 U	0.24 J
	8/4/2022	<1.00 U	0.62 J	60.0	<0.70 U	<0.50 U	1.70 J+	<4.0 U	<0.25 U	<1.00 U
	1/23/2023	<1.00 U	0.45 J	55.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	<0.25 U	<1.00 U
	7/26/2023	<1.00 U	0.33 J	61.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	<0.25 U	<1.00 U
	2/6/2018	<0.45 U	1.30 J	26.5	<0.07 U	<0.15 U	<0.87 U	<1.7 U	<0.25 U	<0.11 U
	5/3/2018	0.86 J	<0.72 U	28.6	<0.07 U	<0.15 U	<0.87 U	NS	<0.25 U	<0.11 U
	8/10/2018	1.10 J	<0.68 U	26.6	<0.09 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	2/14/2019	2.50	<0.68 U	46.0	<0.09 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	9/5/2019	3.50	<0.68 U	66.5	<0.09 U	<0.15 U	0.92 J	<1.3 U	<0.25 U	<1.10 U
	2/17/2020	3.30	<0.68 U	43.3	<0.12 U	<0.15 U	0.68 J	<1.5 U	<0.25 U	<0.07 U
D-6R	8/19/2020	2.60	<0.68 U	33.0	<0.12 U	<0.15 U	0.46 J	<1.5 U	<0.25 U	<0.07 U
	2/25/2021	1.00	<0.68 U	39.0	<0.12 U	<0.15 U	0.77 J	<1.5 U	<0.25 U	0.27 J
	8/11/2021	1.40	<0.68 U	28.0	<0.12 U	<0.15 U	0.64 J	<1.5 U	<0.25 U	<0.07 U
	2/7/2022	<5.00 U	<5.00 U	27.0	<3.50 U	<0.50 U	<7.50 U	<4.0 U	<0.50 U	<1.00 U
	8/5/2022	0.43 J	0.85 J	22.0	<0.70 U	<0.50 U	3.80 J+	<4.0 U	<0.50 U	<1.00 U
	1/23/2023	<1.00 U	0.64 J	20.0	<0.70 U	0.12 J	<1.50 U	<4.0 U	<0.50 U	<1.00 U
	7/27/2023	0.48 J	0.46 J	21.0	<7.00 U	<0.50 U	<1.50 U	<4.0 U	<0.50 U	<1.00 U
	2/13/2018	0.94 J	2.00 J	68.6	0.25 J	0.28 J	10.1	<1.7 U	<0.25 U	1.80
	5/3/2018	0.62 J	0.88 J	42.3	<0.07 U	0.33 J	4.20	NS	<0.25 U	0.28 J
	8/13/2018	<0.41 U	0.98 J	38.2	<0.09 U	<0.15 U	3.20 J	<1.5 U	<0.25 U	<1.10 U
	2/15/2019	<0.41 U	<0.68 U	26.3	<0.09 U	<0.15 U	1.90 J	<1.5 U	<0.25 U	<1.10 U
	9/4/2019	0.54 J	1.20 J	56.9	0.10 J	<0.15 U	4.40	<1.3 U	<0.25 U	<1.10 U
	2/14/2020	<0.41 U	0.70 J	34.4	<0.12 U	0.30 J	2.90	<1.5 U	<0.25 U	<0.07 U
MW-03	8/21/2020	<0.41 U	0.79 J	40.0	<0.12 U	0.28 J	3.90	<1.5 U	<0.25 U	<0.07 U
	2/26/2021	<0.41 U	0.72 J	28.0	<0.12 U	0.18 J	2.20	<1.5 U	<0.25 U	0.15 J
	8/16/2021	<0.41 U	1.00 J	49.0	<0.12 U	0.23 J	4.10	<1.5 U	0.12	0.15 J
	2/3/2022	<1.00 U	1.50	42.0	0.11 J	0.82	4.80	<4.0 U	<0.25 U	0.29 J
	8/4/2022 [1]	0.35 J	1.40	41.0	<0.70 U	0.54	0.93 J	<4.0 U	<0.50 U	<1.00 U
	1/23/2023	<1.00 U	0.90 J	28.0	0.05 J	0.42 J	3.10	<4.0 U	0.30 B	<1.00 U
	7/26/2023	<1.00 U	0.91 J	38.0	0.06 J	0.50	4.10	<4.0 U	<0.50 U	<1.00 U
	2/14/2018	1.90	<0.72 U	48.0	<0.07 U	<0.15 U	1.40 J	<1.7 U	<0.25 U	0.27 J
	5/3/2018	2.00	<0.72 U	42.4	<0.07 U	<0.15 U	1.10 J	NS	<0.25 U	0.16 J
	8/9/2018	1.10 J	<0.68 U	64.0	<0.09 U	<0.15 U	1.00 J	<1.5 U	<0.25 U	<1.10 U
	2/19/2019	0.74 J	<0.68 U	64.1	0.11 J	<0.15 U	2.40 J	<1.5 U	<0.25 U	<1.10 U
	9/4/2019	1.70 J	0.80 J	66.3	0.12 J	<0.15 U	4.00 J	1.7 J	<0.25 U	1.10 J
	2/17/2020	0.71 J	0.74 J	47.1	<0.12 U	<0.15 U	1.40 J	<1.5 U	<0.25 U	0.40 J
MW-09	8/20/2020	0.56 J	<0.68 U	52.0	<0.12 U	<0.15 U	2.70	<1.5 U	<0.25 U	0.75
	3/2/2021	0.48 J	1.80 J	110	0.38 J	<0.15 U	10.0	6.0	0.26 J	3.60
	8/10/2021	3.30	<0.68 U	46.0	<0.12 U	<0.15 U	2.00	<1.5 U	<0.25 U	0.47 J
	2/8/2022	3.30 J	<5.00 U	42.0	0.11 J	<2.50 U	<7.50 U	<4.0 U	<0.25 U	<5.00 U
	8/3/2022	0.61 J	1.30	110	0.08 J	<0.50 U	4.00 J+	0.94 J	<0.25 U	0.82 J
	1/26/2023	1.10	0.54 J	37.0	0.03 J	<0.50 U	<1.50 U	<4.0 U	0.19 J	0.17 J
	7/26/2023	0.63 J	0.50 J	40.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	<0.25 U	<1.00 U

	Analyte:	Lithium	Mercury [4]	Molybdenur	n	Selenium	Thallium	n [4]	Radium-22	6 [2]	Radium-22	8 [2]	Radiur (226+228	
Well ID	Sample Date	μg/L	μg/L	μg/L		μg/L	μg/L		pCi/L		pCi/L		pCi/L	
	2/14/2018	16.4 J	<0.05 U	<3.4	U	48.5	<0.12	U	<0.03	U	<0.22	U	<2.00	U
	5/4/2018	30.7	NS	<3.4	U	52.8	NS		7.47		<0.29	U	9.47	
	8/8/2018	<11.0 U	<0.05 U	2.7	J	47.9	<0.11	U	<1.20	U	<0.24	U	<2.00	U
	2/14/2019	<11.0 U	<0.05 U	2.4	J	47.4	<0.11	U	0.24		<1.44	U	1.74	J
	9/5/2019	<13.0 U	<0.05 U	<2.0	U	56.8	<0.11	U	<0.19	U	<-1.22	С	<2.00	U
	2/14/2020	<11.0 U	0.06 J	<2.0	U	50.1	<0.13	U	0.32	J	<-0.05	С	1.82	J
Core-2S	2/14/20 [1]	14.2 J	0.12 J	<2.0	U	50.6	<0.13	U	<-0.25	U	0.28	J	0.78	J
0016-20	8/24/2020	<11.0 U	<0.08 U	2.7	J	60.0	<0.13	U	< 0.35	U	<0.37	U	<2.00	U
	2/26/2021	<11.0 U	<0.08 U	<2.0	U	52.0	<0.13	U	<0.385	U	<1.64	U	<2.00	U
	8/10/2021	<11.0 U	<0.08 U	<2.0	U	63.0	<0.13	U	<0.432	U	<1.46	U	<2.00	U
	2/3/2022 [1]	<30.0 UJ	<0.20 U	<10	U	62.0	<0.20	U	<0.213	U	1.81		2.31	J
	8/4/2022	14.0 J	<0.20 U	<10	U	71.0	0.019	J+	1.29		<1.03	U	2.79	J
	1/23/2023	<30.0 U	<0.20 U	<10	U	54.0	<0.20	U	<0.150	U	<0.718	U	<2.00	U
	7/26/2023	<30.0 U	<0.20 U	<10	U	64.0	<0.20	U	<0.361	U	<0.523	U	<2.00	U
	2/6/2018	863	0.13 J	38.5		81.3	<0.12	U	<0.20	U	< 0.42	U	<2.00	U
	5/3/2018	841	0.09 J	43.7		103	<0.12	U	1.01		<1.31	U	2.51	J
	8/10/2018	927	0.39	43.8		96.5	<0.11	U	NS		NS		NS	
	2/14/2019	854	0.07 J	46.9		78.7	<0.11	U	0.43		<0.73	U	1.93	J
	9/5/2019	1,140	0.15 J	35.8		47.0	<0.11	U	<0.27	U	<-0.16	U	<2.00	U
	2/17/2020	992	0.33	54.2		70.9	<0.13	U	0.56	J	<0.41	U	2.06	J
D-6R	8/19/2020	890	0.20	57.0		79.0	<0.13	U	<0.17	U	<-0.11	U	<2.00	U
	2/25/2021	880	0.36 J	72.0		99.0	<0.13	U	0.849		<1.55	U	2.35	J
	8/11/2021	760	0.42	69.0		93.0	<0.13	U	0.584		<2.13	U	2.08	J
	2/7/2022	860	0.30 J+	84.0		100.0	<0.20	U	<0.395	U	<0.712	U	<2.00	U
	8/5/2022	870	0.15 J	87.0		93.0	<0.20	U	<0.225	U	<0.313	U	<2.00	U
	1/23/2023	810	<0.20 U	94.0		88.0	<0.20	U	<0.255	U	<1.08	U	<2.00	U
	7/27/2023	800	0.14 J	91.0		81.0	<0.20	U	<0.164	U	1.81		2.31	J
	2/13/2018	145	1.30	1,030		36.7	<0.12	U	2.98		<0.37	U	4.48	J
	5/3/2018	198	NS	1,290		41.3	NS		7.65		<0.49	U	9.15	
	8/13/2018	134	0.46	1,550		32.8	<0.11	U	5.96		<0.28	U	7.46	
	2/15/2019	108	0.42	1,120		22.2	<0.11	U	<0.19	U	2.26		2.76	J
	9/4/2019	156	0.83	1,380		28.3	<0.11	U	0.43		<-0.08	U	<2.00	U
	2/14/2020	110	0.63	1,180		25.9	<0.13	U	<0.16	U	1.14	J	1.64	J
MW-03	8/21/2020	130	1.20	1,400		29.0	<0.13	U	0.37	J	<-1.10	U	1.87	J
	2/26/2021	95.0	0.62 J	1,200		21.0	<0.13	U	0.323		<1.70	U	1.82	J
	8/16/2021	140	1.20	1,300		29.0	<0.13	U	<0.216	U	<2.12	U	<2.00	U
	2/3/2022	130	1.40	1,400		33.0	0.046	J	<0.338	U	<1.56	U	<2.00	U
	8/4/2022 [1]	120	1.20	1,300		30.0	0.23	J	0.441		<0.865	U	1.94	J
	1/23/2023	84.0	0.72	1,300		35.0	0.025	J	<0.278	U	<-0.891	U	<2.00	U
	7/26/2023	140	1.10	1,500	_	35.0	0.05	J	<0.414	U	<0.747	U	<2.00	U
	2/14/2018	18.8 J	<0.05 U		J	82.7	<0.12	U	<0.08	U	<0.80	U	<2.00	U
	5/3/2018	<9.00 U	NS		U	90.6	NS 0.44		1.07		<0.01	U	2.57	J
	8/9/2018	<11.0 U	<0.05 U		J	81.2	<0.11	U	<0.30	U	<0.15	U	<2.00	U
	2/19/2019	<11.0 U	<0.05 U		U	73.0	<0.11	U	<-0.03	U	<0.66	U	<2.00	U
	9/4/2019	<13.0 U	<0.05 U		U	70.8	<0.11	U	<0.15	U	<0.69	U	<2.00	U
M/M/ 00	2/17/2020	18.6 J	<0.05 U		U	67.4	<0.13	U	<0.27	U	<0.03	U	<2.00	U
MW-09	8/20/2020	<11.0 U	<0.05 U		U	60.0	<0.13	U	2.01		<0.50	U	3.51	J
	3/2/2021	19.0 J	<0.08 U		U	50.0	<0.13	U	<0.395	U	<2.13	U	<2.00	U
	8/10/2021	20.0 J	<0.08 U		J	52.0	<0.13	U	0.402		<2.32	U	1.90	J
	2/8/2022	15.0 J	0.30 J+		U	50.0	<1.00	U	0.713		<0.049		2.21	J
	8/3/2022	12.0 J	<0.20 U		U	47.0	0.026	J+	<0.00	U	<0.395	U	<2.00	U
	1/26/2023	<30.0 U	<0.20 U		U	41.0	0.028	J	<0.294	U	<0.608	U	<2.00	U
	7/26/2023	<30.0 U	<0.20 U	<10	U	39.0	< 0.20	U	< 0.363	U	<1.24	U	<2.00	U

	Analyte:	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt [4]	Fluoride	Lead
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	mg/L	μg/L
	2/14/2018	<0.45 U	0.81 J	67.4	<0.07 U	<0.15 U	2.20	<1.7 U	<0.25 U	<1.10 U
	5/3/2018	<0.45 U	<0.72 U	81.8	<0.07 U	<0.15 U	1.60 J	NS	<0.25 U	<1.10 U
	5/3/2018 [1]	<0.45 U	<0.72 U	76.8	<0.71 U	<0.15 U	1.70 J	NS	<0.25 U	<1.10 U
	8/10/2018	<0.41 U	<0.68 U	87.9	<0.09 U	<0.15 U	1.50 J	<1.5 U	<0.25 U	<1.10 U
	2/18/2019	<0.41 U	<0.68 U	101	<0.09 U	<0.15 U	1.60 J	<1.5 U	<0.25 U	<1.10 U
	9/3/2018	<0.41 U	<0.68 U	61.4	<0.09 U	<0.15 U	1.30 J	<1.3 U	<0.25 U	<1.10 U
	2/14/2020	<0.41 U	<0.68 U	83.6	<0.12 U	<0.15 U	1.90 J	<1.5 U	<0.25 U	0.07 J
MW-10S	8/21/2020	6.80	11.0	58.0	4.40	5.40	52.0	NS	<0.25 U	5.90
	8/21/2020 [5]	<0.41 U	<0.68 U	58.0	<0.12 U	<0.15 U	1.20 J	<1.5 U	<0.25 U	<0.07 U
	3/1/2021	0.41 J	<0.68 U	110	<0.12 U	<0.15 U	1.50 J	<1.5 U	0.25 J	0.27 J
	8/11/2021	0.64 J	<0.68 U	140	<0.12 U	<0.15 U	3.20	<1.5 U	<0.10 U	0.32 J
	2/7/2022	<5.00 U	<5.00 U	78.0	<3.50 U	<0.50 U	1.90 J+	<4.0 U	<0.25 U	<1.00 U
	8/2/2022	<1.00 U	<1.00 U	59.0	<0.70 U	<0.50 U	3.00 J+	<4.0 U	<0.25 U	0.26 J
	1/24/2023	<1.00 U	0.52 J	41.0	<0.70 U	<0.50 U	3.40	<4.0 U	0.19 J	<1.00 U
	7/25/2023	<1.00 U	0.42 J	83.0	<0.70 U	<0.50 U	4.10	<4.0 U	<1.00 U	<1.00 U
	2/14/2018	0.47 J	<0.72 U	45.0	0.11 J	0.16 J	8.60	<1.7 U	<0.25 U	0.17 J
	5/4/2018	0.48 J	<0.72 U	43.8	<0.07 U	0.21 J	8.40	NS	<0.25 U	<0.11 U
	8/13/2018	0.48 J	<0.68 U	51.8	<0.09 U	<0.15 U	8.10	<1.5 U	<0.25 U	<1.10 U
	2/19/2019	0.58 J	<0.68 U	45.0	<0.09 U	<0.15 U	12.5	<1.5 U	<0.25 U	<1.10 U
	9/5/2019	0.45 J	<0.68 U	44.5	<0.09 U	<0.15 U	9.60	<1.3 U	<0.25 U	<1.10 U
	2/17/2020	0.46 J	0.46 J	41.7	<0.12 U	0.23 J	9.40	<1.5 U	<0.25 U	<0.07 U
MW-12	8/19/2020	<0.41 U	<0.68 U	39.0	<0.12 U	<0.15 U	12.0	<1.5 U	<0.25 U	<0.07 U
	2/25/2021	<0.41 U	<0.68 U	39.0	<0.12 U	<0.15 U	7.20	<1.5 U	<0.25 U	0.25 J
	8/11/2021	0.41 J	0.82 J	54.0	0.12 J	0.22 J	9.10	2.9 J	0.11	1.40
	2/3/2022 8/4/2022	0.41 J 0.36 J	0.87 J 0.80 J	34.0 35.0	0.05 J <0.70 U	0.54 0.30 J	11.0	<4.0 U	<0.25 U <0.25 U	0.18 J <1.00 U
							1.60			
	1/26/2023 7/26/2023	0.46 J 0.39 J	0.51 J 0.41 J	29.0 32.0	0.05 J 0.04 J	0.27 J 0.31 J	8.80 8.80	<4.0 U	0.25 0.14 J	<1.00 U
	2/13/2018	<0.45 U	<0.72 U	54.1	<0.07 U	<0.15 U	0.93 J	<1.7 U	<0.25 U	<0.11 U
	5/4/2018	<0.45 U	<0.72 U	50.3	<0.07 U	<0.15 U	<0.87 U	NS	<0.25 U	<0.11 U
	8/13/2018	<0.43 U	<0.72 U	56.9	<0.07 U	<0.15 U	<0.70 U	<1.5 U	<0.25 U	<1.10 U
	2/19/2019	<0.41 U	1.50 J	155	0.91	<0.15 U	9.50	3.5 J	<0.25 U	4.10
	9/5/2019	<0.41 U	<0.68 U	50.7	0.09 J	<0.15 U	1.90 J	<1.3 U	<0.25 U	<1.10 U
	9/5/19 [1]	<0.41 U	<0.68 U	50.8	0.16 J	<0.15 U	4.00 J	<1.3 U	<0.25 U	<1.10 U
	2/14/2020	<0.41 U	<0.68 U	59.4	<0.12 U	<0.15 U	2.00 J	<1.5 U	<0.25 U	0.22 J
	8/19/2020	<0.41 U	<0.68 U	54.0	<0.12 U	<0.15 U	3.90 J	<1.5 U	<0.25 U	0.078 J
MW-13	2/25/2021	<0.41 U	<0.68 U	58.0	<0.12 U	<0.15 U	0.69 J	<1.5 U	<0.25 U	0.075 J
	2/25/2021 [1]	<0.41 U	<0.68 U	60.0	<0.12 U	<0.15 U	0.61 J	<1.5 U	<0.25 U	<0.07 U
	8/17/2021	<0.41 U	<0.68 U	42.0	<0.12 U	<0.15 U	0.74 J	<1.5 U	0.12 J+	<0.07 U
	2/3/2022	<1.00 U	<1.00 U	58.0	0.05 J	<0.50 U	1.90	<4.0 U	0.08	0.44 J
	8/4/2022	<1.00 U	0.70 J	55.0	<0.70 R	<0.50 R	<1.50 R	<4.0 U	0.09	<1.00 U
	1/26/2023	<1.00 U	0.47 J	53.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.11	<1.00 U
	7/25/2023	<1.00 U	0.36 J	49.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.09	<1.00 U
	7/25/2023 [1]	<1.00 U	0.37 J	48.0	<0.70 U	<0.50 U	<1.50 U	<4.0 U	0.09	<1.00 U

	Analyte:	Lithium	Mercury [4]	Molybden	um	Selenii	um	Thallium	n [4]	Radium-220	6 [2]	Radium-22	8 [2]	Radiu (226+228	
Well ID	Sample Date	μg/L	μg/L	μg/L		μg/L		μg/L		pCi/L		pCi/L		pCi/L	
	2/14/2018	21.7	<0.05 U	<3.4	U	207		<0.12	U	0.46		<0.61	U	1.95	J
	5/3/2018	<9.00 U	NS	<3.4	U	241		NS		8.12		<-0.35	U	9.62	
	5/3/2018 [1]	<9.00 U	NS	<3.4	U	238		<0.11	U	12.2		<1.21	U	13.7	
	8/10/2018	15.9 J	0.08 J	<2.0	U	223		<0.11	U	3.65		<-0.03	U	5.15	
	2/18/2019	<11.0 U	<0.05 U	<2.0	U	215		<0.11	U	<0.00	U	< 0.57	U	<2.00	U
	9/3/2018	15.5 J	<0.05 U	<2.0	U	200		<0.11	U	<0.43	U	< 0.43	U	<2.00	U
	2/14/2020	<11.0 U	<0.05 U	<2.0	U	192		<0.13	U	<0.26	U	<-0.01	U	<2.00	U
MW-10S	8/21/2020	16.0 J	<0.08 U	<2.0	U	10.0		2.10		<0.15	U	< 0.39	U	<2.00	U
	8/21/2020 [5]	16.0 J	<0.08 U	<2.0	U	160		<0.13	U	<0.47	U	< 0.39	U	<2.00	U
	3/1/2021	19.0 J	<0.08 U	<2.0	U	160		<0.13	U	<0.238	U	<1.27	U	<2.00	U
	8/11/2021	<11.0 U	<0.08 U	<2.0	U	140		<0.13	U	0.367		<2.56	U	1.87	J
	2/7/2022	19.0 J	0.13 J	<10	U	160		<0.20	U	1.01		<0.236	U	2.51	J
	8/2/2022	16.0 J	<0.20 U	<10	U	160		<0.20	U	<0.208	U	<0.901	U	<2.00	U
	1/24/2023	<30.0 U	<0.20 U	<10	U	150		<0.20	U	1.25		<1.86	U	2.75	J
	7/25/2023	<30.0 U	<0.20 U	<10	U	130		<0.20	U	<0.491	U	<1.24	U	<2.00	U
	2/14/2018	206	0.47	748		267		<0.12	U	<0.30	U	<-0.15	U	<2.00	U
	5/4/2018	256	NS	814		303		NS		7.56		<0.23	U	9.06	
	8/13/2018	238	0.20	824		297		<0.11	U	6.62		<0.46	U	8.12	
	2/19/2019	195	0.41	797		254		<0.11	U	<0.23	U	2.21	J	2.71	J
	9/5/2019	293	0.47	999		269		<0.11	U	0.75	J	<-1.16	U	2.25	J
	2/17/2020	227	0.55	873		251		<0.13	U	0.75	J	<0.55	U	2.25	J
MW-12	8/19/2020	200	0.43	820		270		<0.13	U	0.53	J	<0.33	U	2.03	J
	2/25/2021	200	0.31 J	730		210		<0.13	U	0.448		<2.66	U	1.95	J
	8/11/2021	190	0.37	880		250		<0.13	U	<0.475	U	<1.69	U	<2.00	U
	2/3/2022	180	0.65	930		250		<0.20	U	<0.261	U	<1.60	U	<2.00	U
	8/4/2022	130	0.40	810		240		0.11	J	0.440		<-0.176	U	1.94	J
	1/26/2023	130	0.28	780		210		<0.20	U	0.741		<-0.298	U	2.24	J
	7/26/2023	160	0.40	920		230		0.02	J 	<0.206	U	<0.112	U	<2.00	U
	2/13/2018	<9.00 U	<0.05 U	<3.4	U	1.1	J	<0.12	U	3.52		<0.18	U	5.02	
	5/4/2018	<9.00 U	NS	<3.4	U	1.8	J	NS		9.20		<-0.09	U	10.7	
	8/13/2018	<11.0 U	<0.05 U	<2.0	U	1.3	J	<0.11	U	5.53	-	<1.38	U	7.03	
	2/19/2019	<11.0 U	<0.05 U	9.7	J	1.7	J	<0.11	U	0.63	J	<1.23	U	2.13	J
	9/5/2019	<13.0 U	<0.05 U <0.05 U	<2.0 <2.0	U	1.6	J	<0.11	U	0.85	J U	<-0.37	U	2.35	J
	9/5/19 [1]	<13.0 U		<2.0 <2.0	U	1.3 1.9	J	<0.11	U	<0.08	U	<-0.27	U	<2.00	U
	2/14/2020	<11.0 U	<0.08 U <0.08 U	<2.0	U	1.9		<0.13 <0.13	U	<0.31	U	<0.26 <1.54	U	<2.00 <2.00	U
MW-13	8/19/2020 2/25/2021	<11.0 U	<0.08 U	<2.0	U	2.1		<0.13	U	<0.12 <0.260	U	<1.92	U	<2.00	U
	2/25/2021 [1]	<11.0 U	<0.08 U	<2.0	U	2.1		<0.13	U	<0.260	U	<1.32	U	<2.00	U
	8/17/2021	<11.0 U	<0.08 U	<2.0 <2.0	U	1.7		<0.13	U	<0.357 0.462	U	<2.33	U	1.96	J
	2/3/2022	<11.0 U	<0.08 U <0.20 U	<10.0	U	2.3		<0.13	U	<0.263	U	<2.33	U	<2.00	U
	8/4/2022	<30.0 U	<0.20 U	<10.0	U	1.8		<0.20	U	0.329	U	1.55	U	1.88	J
	1/26/2023	<30.0 U	<0.20 U	<10.0	U	2.3		<0.20	U	0.329		<1.04	U	1.00	J
	7/25/2023	<30.0 U	<0.20 U	<10.0	U	2.0		<0.20	U	0.474		<0.363	U	1.97	J
	-	<30.0 U	<0.20 U	<10.0	U	2.0		<0.20	U	0.477		<0.363	U	2.11	J
	7/25/2023 [1]	<3U.U U	<u.zu td="" u<=""><td>< 10.0</td><td>U</td><td>2.0</td><td></td><td><0.20</td><td>U</td><td>0.607</td><td></td><td><0.183</td><td>U</td><td>2.11</td><td>J</td></u.zu>	< 10.0	U	2.0		<0.20	U	0.607		<0.183	U	2.11	J

	Analyte:	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt [4]	Fluoride	Lead
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	μg/L	mg/L	μg/L
	8/2/2022	0.93 J	24.0	200	<3.50 U	0.16 J	42.0	29.0	0.77	3.40
MW-24D [6]	1/24/2023	1.10	21.0 [7]	190	<3.50 U	0.24 J	32.0	24.0	0.67	2.6
	7/24/2023	2.80	19.0 [7]	190	<14.0 U	0.23 J	32.0	24.0	<2.5 U	2.9
	2/8/2022	8.70	12.0	570	<3.50 U	<2.50 U	8.10	2.9 J	0.83 J	<5.00
MW-24S [6]	8/2/2022	4.50	15.0	330	0.037 J	<0.50 U	11.0	3.2 J	0.57 J	1.10
10100-243 [6]	1/24/2023	3.30	12.0 [7]	230	<0.70 U	<0.50 U	2.2	2.2 J	1.3	0.27 J
	7/24/2023	9.10	22.0 [7]	500	<3.50 U	<0.50 U	300	6.4	0.85	1.40

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

	Analyte:	Lithium	Mercury [4]	Molybdenum	Selenium	Thallium [4]	Radium-226 [2]	Radium-228 [2]	Radium (226+228) [3]
Well ID	Sample Date	μg/L	μg/L	μg/L	μg/L	μg/L	pCi/L	pCi/L	pCi/L
	8/2/2022	1,200	<0.20 U	89.0	13.0	0.022 J	0.843	<1.21 U	2.34 J
MW-24D [6]	1/24/2023	1,200	<0.20 U	72.0	3.6	<0.20 U	0.813	2.51	3.32 J
	7/24/2023	1,200	<0.20 U	74.0	2.5	<0.20 U	1.32	<0.349 U	2.82 J
	2/8/2022	240	0.35	41.0	<5.00 U	<1.00 U	0.757	<0.562 U	2.26 J
MW-24S [6]	8/2/2022	280	0.10 J	34.0	0.66 J	<0.20 U	0.537	2.06	2.60 J
10100-243 [0]	1/24/2023	370	0.15 J	28.0	0.63 J	<0.20 U	0.582	2.56	3.14 J
	7/24/2023	460	0.20	33.0	0.61 J	0.021 J	<0.545 U	<0.549 U	<2.00 U

Notes:

µg/L micrograms per Liter

mg/L milligrams per Liter

pCi/L picocurie per Liter

NS Not Sampled

- J Constituent detected below reportable quantitation limit; result is an estimated value.
- J+ Constituent detected below reporting limit; result is an estimated value with a high bias.
- R Sample results rejected due to Matrix Spike/Matrix Spike Duplicate Recoveries less than 30%
- U Constituent not detected above method detection limit.
- [1] Duplicate sample collected
- [2] Radium values shown are the 'result' reported by lab, including non-detects shown with '<'.
- [3] The sum of Radium-226 + Radium-228 uses one-half the reporting limit (data not shown) for non-detect (<) values.
- [4] Appendix IV constituent not detected in February 2018 full scan Assessment Monitoring event. Full Appendix IV list analytes were not analyzed in the May 2018 resampling event.
- [5] Sample re-analyzed within holding time.
- [6] MW-24D and MW-24S were installed as part of the nature and extent of contamination investigation to monitor the potential presence of CCR constituents migrating offsite.
- [7] Result suspected to be elevated due to grout intrusion

TABLE 9 STATISTICALLY SIGNIFICANT LEVELS - APPENDIX IV CONSTITUENTS

FEDERAL CCR RULE - 2023 ANNUAL GROUNDWATER AND CORRECTIVE ACTION REPORT Westland Ash Management Facility, Cell B - MD

	Antimony		Ars	enic	Bery	/llium	Chro	omium	Co	balt	Litt	nium	Me	rcury	Molyb	denum		226, 228 bined	Sele	enium
WELL ID	WELL ID GWPS = 6 μg/L		·		GWPS = 4 μg/L		GWPS = 100 μg/L		GWPS = 6 µg/L		GWPS = 40 μg/L		GWPS = 2 μg/L		GWPS = 100 μg/L		GWPS = 5 pCi/L		GWPS = 50 µg/L	
	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend	SSL	Trend
Core-2S																				
D-6R											•	1							•	-
MW-03											•	\			•	1				
MW-09																			•	-
MW-10S																			•	-
MW-12											•	\			•	-			•	↓
MW-13																				

Definitions:

µg/L micrograms per Liter

pCi/L picocuries per Liter

SSL Statistically Significant Level

SSI Statistically Significant Increase

LCL Lower Confidence Limit

GWPS Groundwater Protection Standard

Legend:

	Not evaluated because no SSI for the constituent in this well.
	No SSL (LCL does not exceed GWPS).
-	Constituent does not have a significant increasing trend in this monitoring well (based on Mann Kendall Trend Analysis).
1	Increasing trend for the constituent in this monitoring well (based on Mann Kendall Trend Analysis).
SSL Lege	end: Ratio of LCL over GWPS
•	LCL is greater than GWPS by 1 to 2 times
•	LCL is greater than GWPS by >2 to 10 times
•	LCL is greater than GWPS by >10 times

Notes:

- [1] Barium, cadmium, fluoride, lead, and thallium did not exceed their GWPS in any compliance well in any monitoring event; thus, the LCL was not calculated for these constituents.
- [2] Trend analysis was not performed for well/constituent pairs that did not have SSLs per the Statistical Analysis Calculations Package for Compliance Well Appendix IV Assessment Monitoring Data, 2023 Second Semi-Annual Monitoring Event Cell B, Westland Ash Storage Facility, Dickerson, MD

APPENDIX A Groundwater Flow Velocity Calculation

Appendix A

Groundwater Velocity Calculation

Westland Ash Management Facility Cell B

Dickerson, Maryland

1. Governing Equation

Groundwater flow velocity at the Site was calculated between several monitoring wells around Cell B. The calculations were performed using the following equation.

$$V_{\eta} = \frac{K}{\eta} \times \frac{\Delta h}{\Delta l}$$

Where:

 $V_{\rm n}$ = Groundwater velocity (cm per second)

K = Hydraulic conductivity estimated through aquifer pumping tests (cm per second)

 $\eta = \text{Effective porosity } \% \text{ (unitless)}$

 Δh = Change in groundwater elevation between two points (feet)

 Δl = Distance between two points (feet)

This equation is for Darcy flow through porous media, but is a reasonable approximation at the site-wide scale for fractured bedrock at Westland.

2. Hydraulic Conductivity


Hydraulic conductivity (*K*) was calculated at select monitoring wells around Phase II. The boreholes for monitoring wells Core 2S, MW-03, MW-09, MW-10S, MW-12, and MW-13 were packer tested prior to well installation. The location of the packer tested wells are shown on **Figure 2**. Straddle packer tests were used to calculate *K* of each monitoring well. The *K* value for each packer test interval within a given borehole was averaged, which generated an average *K* for each test interval. Average *K* values are presented in **Table A-1**. The average of the K value between two monitoring wells is presented in **Table A-2**.

3. Average Porosity

As shown on **Table A-1**, each monitoring well has an average porosity (η) calculated for each screen interval. The averaged η values were obtained from *Groundwater and Wells, Second Edition, Driscoll* [Driscoll, 1986]. A range for η is presented in [Driscoll, 1986] and the average for each η range was used in the calculation. The published η values and the calculated average η values are presented in **Table A-1**.

The averaged η value was then used to estimate an η value for each screen based on the geology observed during the well installation. See diagram below to see how η was estimated for each boring monitoring well screen.

EXAMPLE POROSITY ESTIMATION FOR WELL SCREEN

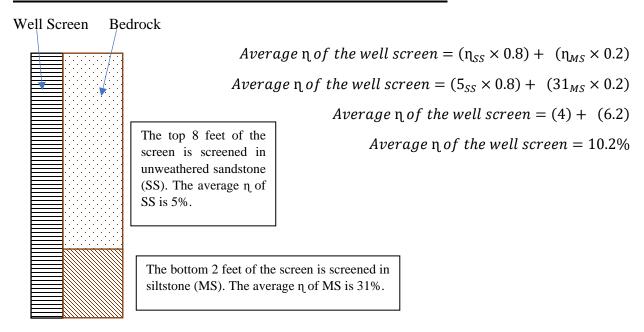

Boring logs were provided in *Basis for Groundwater Monitoring Network* [Geosyntec, 2017a].

After the average η value was calculated for each well screen, the average of the η values between the two monitoring wells along a groundwater flow path was calculated. See **Table A-1** for the calculated average η for each monitoring well screen. The average η value between the two monitoring wells was the η used to calculate the groundwater velocity. Average η value between monitoring wells is presented in **Table A-2**.

4. Monitoring Well Selection

To estimate groundwater velocity, monitoring wells upgradient and downgradient of Cell B were selected. Ideally, monitoring wells should be along a groundwater flow path. Based on that requirement, the groundwater velocity was calculated between D-2 and the downgradient monitoring wells. See **Figure 3** and **Figure 4** for the selected well locations relative to groundwater flow.

5. Groundwater Velocity

Groundwater velocity around Cell B ranged from 1.80 X 10⁻⁵ centimeters per second (cm/sec) (18.6 feet/year) between monitoring wells D-2 and MW-03 to 3.93 X 10⁻⁶ cm/sec (4.07 feet/year) between monitoring wells D-2 and MW-13. The average groundwater velocity around Cell B was calculated at 5.81 X 10⁻⁶ cm/sec (6.01 feet/year). **Table A-2** presents the calculated groundwater velocities. Therefore, to be considered independent samples, groundwater monitoring events should be at least 1.5 months apart for groundwater to completely travel through the 8-inch diameter borehole.

APPENDIX A TABLE A-1

Groundwater Flow Velocity Variables

Westland Ash Management Facility, Cell B Dickerson, Maryland

Groundwater Velocity Equation

$$V_{\eta} = \frac{K}{\eta} \times \frac{\Delta h}{\Delta l}$$

 V_{η} = linear groundwater velocity (cm/sec) K = hydraulic conductivity (cm/sec)

 $\eta = \text{effective porosity (unitless)}$

 Δh = change in head between wells (ft)

 Δl = distance between wells (ft)

Well ID:	Average Hydraulic Conductivity (K) (cm/sec) [3]				
D-2 [1]	5.73E-05				
Core-2S	7.22E-06				
D-6R [2]	1.89E-05				
MW-03	3.32E-04				
MW-09	5.08E-08				
MW-10S	1.12E-05				
MW-12	2.66E-05				
MW-13	5.04E-06				

Upgradient Well	Downgradient Well	Al (ft)	Δh (ft) [6]
D-2	Core-2S	2,220	64.89
D-2	D-6R	2,737	98.50
D-2	MW-03	1,710	44.68
D-2	MW-09	2,772	116.93
D-2	MW-10S	2,997	110.13
D-2	MW-12	2,207	75.95
D-2	MW-13	2,115	69.79

Rock Type	Effective Porosity % (η) [4]	Average η		
Sandstone (SS)	5	5		
Sandstone (mod. Weathered)	15	15		
Sandstone (highly weathered)	30	30		
Siltstone (MS)	21 - 41	31		

Well Location	Geology Observed in Screened Intreval	Average η of Screen
D-2 [5]	Unknown	27.5
Core-2S	50/50 High-moderate weather SS	22.5
D-6R [5]	Unknown	27.5
MW-03	Highly Weathered SS	30.0
MW-09	Moderately Weathered SS and MS	27.8
MW-10S	Highly/Moderately Weathered SS and MS	24.2
MW-12	Highly Weathered SS	30.0
MW-13	Highly Weathered SS	30.2

Notes:

ft - feet

cm/sec - centimeters per second

- [1] Hydraulic conductivity is an average of the Cell B compliance monitoring wells.
- [2] Hydraulic conductivity is an average of MW-12 and MW-10s, which are located on either side of D-6R.
- [3] Average hydraulic conductivity is the average of the hydraulic conductivity calculated in the interval in which the well is screened.
- [4] Porosity is an average of the rock types observed at the Site.
- [5] Average porosity of the screen is an average of the Cell B compliance well screen porosity values.
- [6] Groundwater elevation used to calculate groundwater velocity from the July 2023 monitoring events.

APPENDIX A Table A-2 Groundwater Flow Velocity Calculation

Westland Ash Management Facility, Cell B Dickerson, Maryland

Well ID:	Hydraulic Conductivity (K) (cm/sec)	Average Porosity of Screen Interval (%)	Average K (cm/sec) [1]	Average η	Δh (ft)	Δ1 (ft)	Δ h/Δ l	Linear Velocity (cm/sec)	Linear Velocity (feet/year)
Core-2S	7.22E-06	22.5	3.54E-05	0.24975	64.89	2,220	0.0292	4.15E-06	4.29
D-6R	1.89E-05	27.5	4.13E-05	0.27450	98.50	2,737	0.0360	5.41E-06	5.60
MW-03	3.32E-04	30.0	1.98E-04	0.28725	44.68	1,710	0.0261	1.80E-05	18.6
MW-09	5.08E-08	27.8	3.19E-05	0.27625	116.93	2,772	0.0422	4.86E-06	5.03
MW-10S	1.12E-05	24.2	3.74E-05	0.25825	110.13	2,997	0.0367	5.33E-06	5.51
MW-12	2.66E-05	30.0	4.51E-05	0.28725	75.95	2,207	0.0344	5.41E-06	5.59
MW-13	5.04E-06	30.2	3.43E-05	0.28825	69.79	2,115	0.0330	3.93E-06	4.07

Groundwater Velocity Mean

Groundwater Velocity Median

Groundwater Velocity Equation

$$V_{\eta} = \frac{K}{\eta} \times \frac{\Delta h}{\Delta l}$$

 V_{η} = linear groundwater velocity

K = hydraulic conductivity (cm/sec)

 $\eta = \text{effective porosity (unitless)}$

 $\Delta h = \text{change in head between wells (ft)}$

 Δl = distance between wells (ft)

[1] Average hydraulic conductivity is the average hydraulic conductivities between D-2 and identified well.

2 January 2024

5.81E-06 cm/sec

5.33E-06 cm/sec

6.01 feet/year

feet/year

5.51